


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

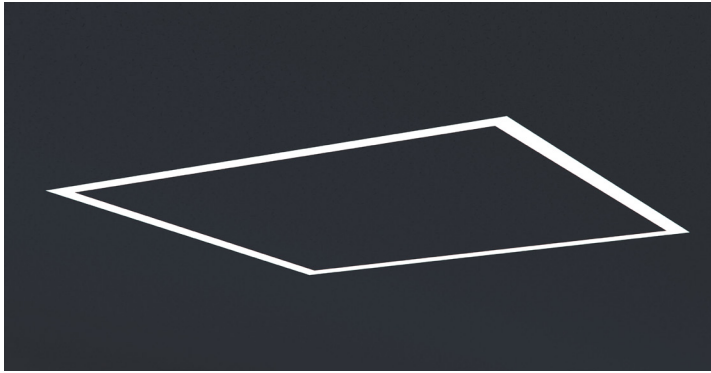

Recessed, square-patterned luminaire with small profile using either flush or pop-out lens. Available for grid and sheetrock ceilings. Custom mounting types also available; consult factory.

FEATURES

- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available (Flush Lens Only)
- Rated Life- 100,000 hours at L70; 50,000 hours at L90

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Aluminum Housing and Steel Gear Tray. **OPTICS** Extruded High Transmission Satin Acrylic Lens With No LED Imaging. Flush or 'Pop-Out' Configuration.


WARRANTY 5 Year Limited Warranty (Covers Standard Components) **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made Made In The USA
ETL Listed Damp Location Rated



ELECTRICAL Integral Driver With 0-10V 10% Dimming Standard. See Below For Optional Lutron Dimming Information

EXTRUSION DIMENSIONS

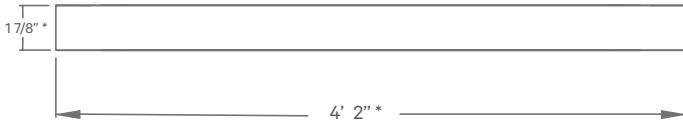

Note: Dimensions reflect fixture housing only and do not include mounting hardware. Please consult factory for dimensions based on mounting type needed.

LED SYSTEM INFORMATION

	System Watts	Delivered Lumens	Efficacy
Standard (LTG1)	55 W	4,900 Lm	89 Lm/W
Low (LTG2)	40 W	3,640 Lm	91 Lm/W
High (LTG3)	70 W	5,950 Lm	85 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING

1 - FIXTURE ID SQUARE REC	2 - SIZE 4X4	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
7 - FINISH W - White (Standard) BLK - Black CC - Custom Color (provide RAL#)	8 - MOUNTING T - 9/16" Tee Grid T15 - 15/16" Tee Grid SG - Slot Grid/Interlude F - Flange NT - No Trim, Spackle Flange	9 - CONTROL EIS* - Integral Sensor by Enlighted WIS* - Integral Sensor by Wattstopper *Available using Flush Lens only	10 - OPTICS FL - Flush Lens POL - 1" Pop-out Lens	11 - OPTIONS EM 120V - Emergency Pack EM 277V - Emergency Pack	