




DATE	PROJECT	FIRM	TYPE
------	---------	------	------

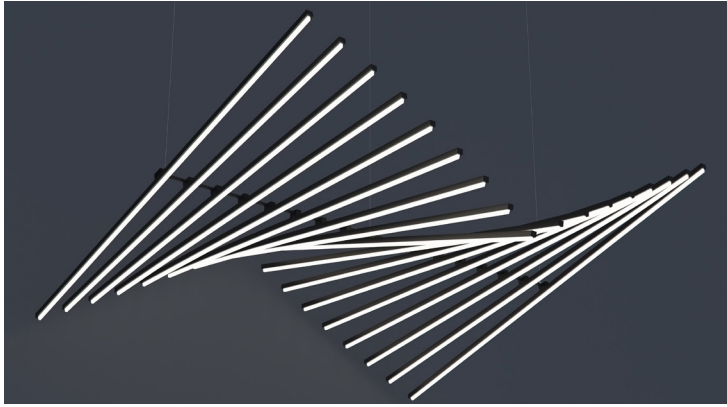


A uniquely designed ave-form luminaire creates an impressive, eye-catching effect. Pendant stem mounted in 4ft lengths.

### FEATURES

- Available In 4ft Lengths Standard
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available

<b>APPLICATIONS</b>	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors			
<b>CONSTRUCTION</b>	Extruded Aluminum Housing With Die Cast Aluminum End Caps	<b>OPTICS</b>	Extruded satin PMMA Lens, No LED Imaging	
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)		<b>FINISH</b>	Standard Powder-Coated Black. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated	 	
<b>ELECTRICAL</b>	Remote Driver With 0-10V 10% Dimming Standard. Optional 1% Dimming and Lutron Drivers Available.			

### EXTRUSION DIMENSIONS

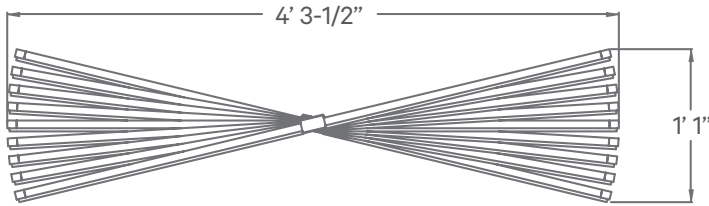

### LED SYSTEM INFORMATION

	System Watts	Delivered Lumens
Standard (LTG1)	TBD	TBD
Low (LTG2)	TBD	TBD
High (LTG3)	TBD	TBD

### ORDERING



<b>1 - FIXTURE ID</b> WAVE	<b>2 - LENGTH</b> 4 - 4 ft	<b>3 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C 2,550Lm)	<b>4 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
<b>7 - FINISH (exterior)</b> BLK - Black (Standard) W - White CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> PS - Pendant Stem (1/8")	<b>9 - OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack			

DATE

PROJECT

FIRM

TYPE

## SIDE PROFILE

