


DATE _____ PROJECT _____ FIRM _____ TYPE _____

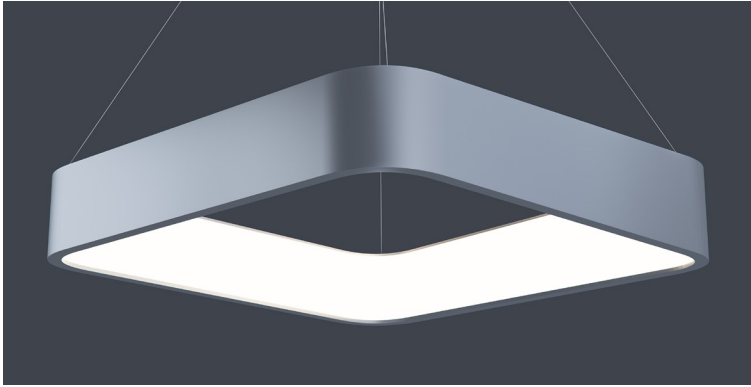

FEATURES

- Provides 30% Uplight and 70% Direct Light Distribution
- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE- [See More](#)

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

FINISH Standard Powder-Coated White. Custom RAL Colors Available

CONSTRUCTION Die Formed and Embossed, Heavy Gauge Cold Rolled Steel Housing

OPTICS Custom Molded Opal Lens

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed Made In The USA Damp Location Rated




DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Other Options Require a Remote Driver. Driver Remote With "FC" (Flat Canopy) Option.

EXTRUSION DIMENSIONS

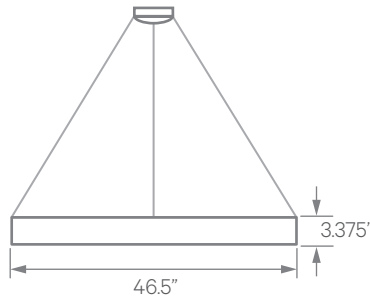

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	48 W	4,548 lm	94 LPW
Low (LTG2)	40 W	3,903 lm	97 LPW
High (LTG3)	58 W	5,330 lm	92 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8 9

1 - FIXTURE ID

QUAD LED

2 - SIZE

4 - 4 ft

3 - COLOR TEMP

- 30 - 3000K/90 CRI
- 35 - 3500K/90 CRI
- 40 - 4000K/90 CRI
- TW** - Tunable White 2700K-6500K
- RGBW30*** - RGB + 3000K
- RGBW35*** - RGB + 3500K

**Requires DMX or TW10 Driver
***Requires DMX Driver

4 - LED SYSTEM

- LTG1 - Standard
- LTG2 - Low
- LTG3 - High
- LTGC - Custom Output

5 - VOLTAGE

- UNV - Universal (120/277V)
- 347V* - 347V

*Must use DB Driver

6 - DRIVER

- DB - Standard Dimming (0-10V)
- DB.1%* - 0.1% Dimming (0-10V)
- ELV-TRI* - 2-wire 1% Dimming (120V only)
ELV and TRIAC Compatible
- LDE1* - Lutron Digital EcoSystem
- LDE5* - 5 Series EcoSystem; 5% Dimming
- PoE - Power over Ethernet. Consult Factory for Compatibility
- DALI* - DALI-2 Driver
- DMX* - For Color Tuning and RGBW
- TW10* - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

*Remote Driver

7 - FINISH

- W - White (Standard)
- BLK* - Black
- CC* - Custom Color (provide RAL#)

*White cord and canopy provided. Must specify for other requests.

8 - MOUNTING

AC - Air Craft Cable

9 - OTHER OPTIONS

- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit
- FC - Flat Canopy (Remote Driver)