


DATE _____ PROJECT _____ FIRM _____ TYPE _____

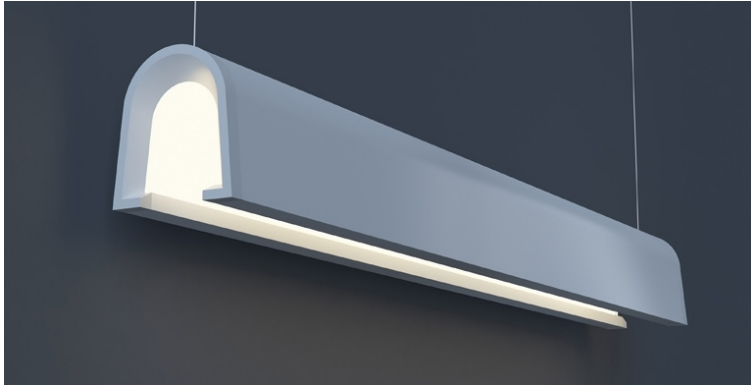

FEATURES

- Available In Made To Measure Lengths Accurate Up To 2"
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE- [See More](#)

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

FINISH Standard Powder-Coated White. Custom RAL Colors Available

CONSTRUCTION Extruded Aluminum Housing and Reflector with Die Cast Ends

OPTICS Concealed LED Source Uplighting with Optically Coated White Reflector and No LED Imaging.




DRIVERS, SENSORS, & POE

For Wiring Diagrams, POE, and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 0-10V, 1% Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
Standard (LTG1)	7 W/ft	7 W/ft	350 lm/ft	647 lm/ft
Low (LTG2)	5 W/ft	5 W/ft	262 lm/ft	485 lm/ft
High (LTG3)	10 W/ft	10 W/ft	500 lm/ft	922 lm/ft

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 IN - D - 5 6 7 8 9 10

1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER (Remote)	
U UP/DN	2 - 2 ft 4 - 4 ft 8 - 8 ft X'-X" - Specify Length (2" Increments) PAT - Pattern (Consult Factory)	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	IN - INDIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	D - DIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V) 347V* - 347V *Must use DB Driver	DB - Standard 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) ELV-TRI - 2-wire 1% Dimming (120V only) ELV and TRIAC Compatible LDE1 - Hi-lume1% EcoSystem FadeToBlack DALI - DALI-2 Driver PoE - Power over Ethernet. Consult PSQ - Lutron 1% Digital Tunable White

7 - FINISH	8 - MOUNTING	9 - OPTICS (Indirect)	10 - OTHER OPTIONS
W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL#)	AC - Air Craft Cable (50")	SD - Standard Diffuser AVI-BW - 120° AVI-OPTIC Batwing	DC - Dual Circuit (Separate Up/Dn Control) 10W EM 120V - Emergency Pack (Remote) 10W EM 277V - Emergency Pack (Remote) EMCKT - Emergency Circuit

*White canopy provided. Must specify for other requests.

DATE

PROJECT

FIRM

TYPE

PATTERNS

Patterns feature illuminated corners and x-patterns. **Must consult factory..**



Square Patterns



X Patterns