


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

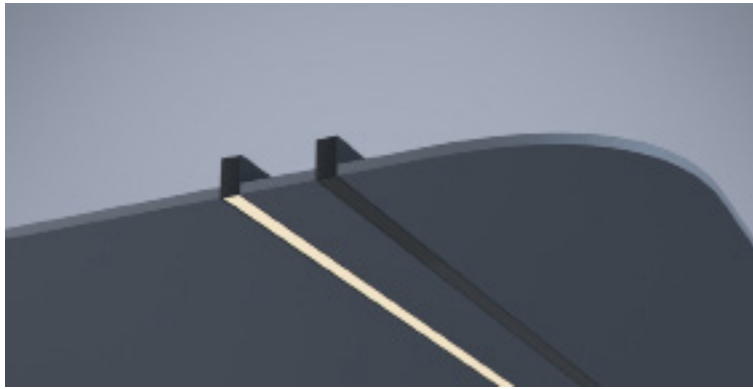

Recessed, architectural luminaire with extremely low profile using specially formulated black optic that allows the unilluminated fixture to seamlessly blend in to dark environments and delivers full illumination when switched on.

FEATURES

- Black to White Optic
- Glare-Free Lighting
- Available In Made To Measure Lengths Specifiable In 4" Increments
- Patterns Available (See Page 2)
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors
---------------------	--

CONSTRUCTION	Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray	OPTICS	Black to White 'Ink' Optic
---------------------	---	---------------	----------------------------

WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
-----------------	--	---------------	---

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

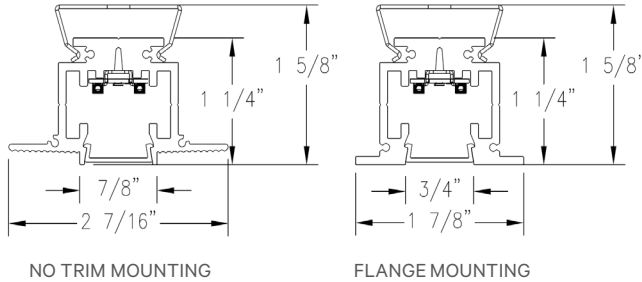

ORDERING	1	2	3	4	5	6	7	8	9
----------	---	---	---	---	---	---	---	---	---

1 - FIXTURE ID RUSH REC - INK	2 - LENGTH 4 - 4 ft 8 - 8 ft X'-X" - Specify Length (4" Increments) PAT - Pattern (Consult Factory)	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility
---	--	---	---	--	--

7 - FINISH W - White (Standard) CC - Custom Color (provide RAL#)	8 - MOUNTING F - Flange NT - No Trim/Spackle Flange	9 - CIRCUIT (Optional) EM 120V - Emergency Pack EM 277V - Emergency Pack
---	--	---

DATE


PROJECT

FIRM


TYPE

PATTERNS


Patterns feature illuminated corners and angles. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns




Custom Angles



Custom Patterns

LENS CUT



Mitered