


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

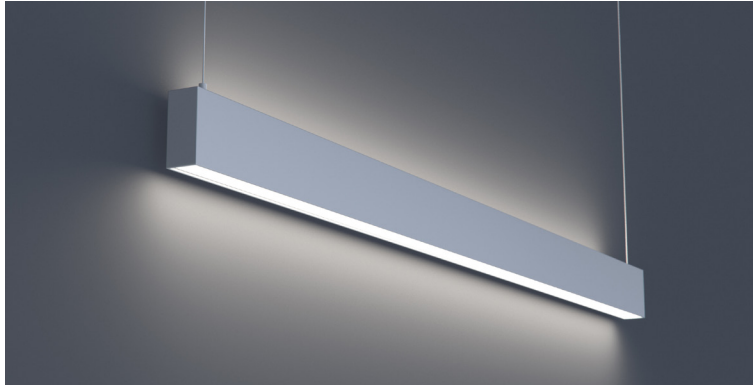

Narrow, linear luminaire with direct and indirect lighting. For use in indoor applications where an LED luminaire with very narrow profile providing continuous light is required.

### FEATURES

- Available In Made To Measure Lengths Specifiable In 4" Increments
- Patterns Available (See Page 2)
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray | **OPTICS** Acrylic Diffuse Lens Direct, Opal White Film Indirect

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




### DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



**ELECTRICAL** Remote Driver with 0-10V Dimming Standard or 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed

### EXTRUSION DIMENSIONS



### LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
Standard (LTG1)	5.25 W/ft	5.25 W/ft	315 lm/ft	510 lm/ft
Low (LTG2)	3.5 W/ft	3.5 W/ft	212 lm/ft	340 lm/ft
High (LTG3)	7.5 W/ft	7.5 W/ft	400 lm/ft	670 lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

**ORDERING** 1 2 3 IN - D - 5 6 7 8 9

**1 - FIXTURE ID** RUSH UPDN  
**2 - LENGTH** 4 - 4 ft, 8 - 8 ft, X'-X" - Specify Length (4" Increments), PAT - Pattern (Consult Factory)  
**3 - COLOR TEMP** 27 - 2700K/90 CRI, 30 - 3000K/90 CRI, 35 - 3500K/90 CRI, 40 - 4000K/90 CRI  
**4 - LED SYSTEM** IN - INDIRECT: LTG1 - Standard, LTG2 - Low, LTG3 - High, LTGC - Custom Output; D - DIRECT: LTG1 - Standard, LTG2 - Low, LTG3 - High, LTGC - Custom Output  
**5 - VOLTAGE** UNV - Universal (120/277V)  
**6 - DRIVER** DB - Standard Dimming (0-10V), DB1% - 1% Dimming (0-10V), DB.1% - 0.1% Dimming (0-10V), PoE - Power over Ethernet. Consult Factory for Compatibility

**7 - FINISH** W - White (Standard), BLK\* - Black, CC\* - Custom Color (provide RAL#)  
**8 - MOUNTING** AC - Air Craft Cable (50"), ACP - Power Over Aircraft Cable  
**9 - OTHER OPTIONS** DC - Dual Circuit (Seperate Up/Dn Control), EM 120V - Emergency Pack, EM 277V - Emergency Pack, EMCKT - Emergency Circuit

\*White cord and canopy provided. Must specify for other requests.

DATE

PROJECT

FIRM


TYPE

## PATTERNS


Patterns feature illuminated corners and angles. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns




Custom Angles



Custom Patterns

## LENS CUT




Mitered

## ACP - 'Power Over Aircraft Cable' Option

**Individual**  
(Up to 8ft Only)



**Continuous Runs**  
Note: Configurations vary based on run lengths; consult factory

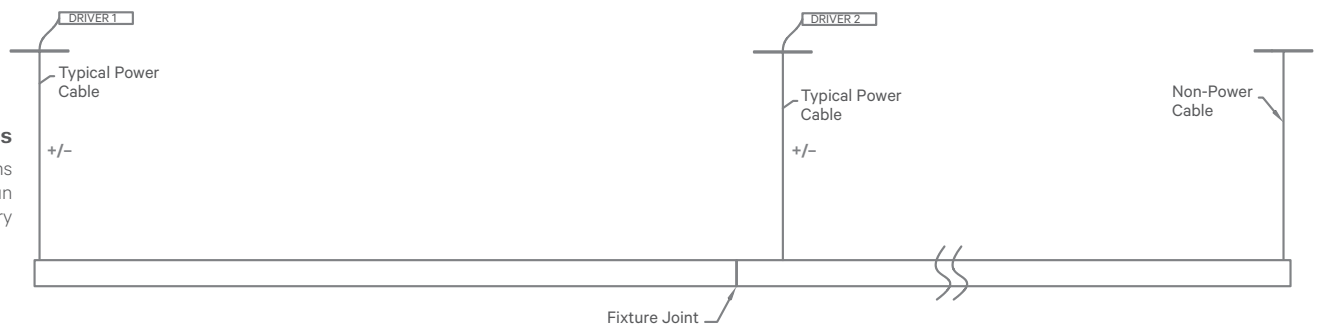

Note: Standard configuration shown. Feeds may vary based on output, driver, and sensor options. Consult Factory.

Updated: 06/12/2020