


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

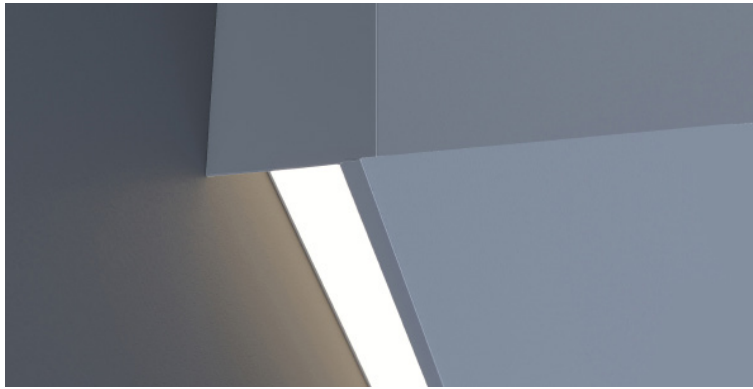

LED wall wash designed for perimeter lighting. Available with specificiable 1", 2", 3", or 4" regressed lens for distribution and roomside glare control.

### FEATURES

- Available In Made To Measure Lengths Accurate Up To 1/16"
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Extruded Aluminum Housing with Fascia to Control Light Distribution | **OPTICS** Extruded High Transmission Satin Acrylic Lens with No LED Imaging

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




### DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS

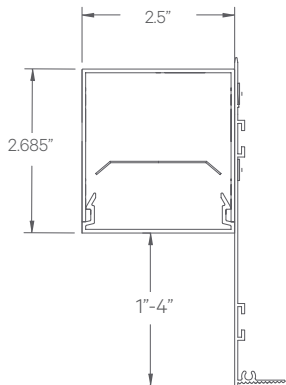

### LED SYSTEM INFORMATION

|                 | Nominal System Watts | Nominal Delivered Lumens | Nominal Efficacy |
|-----------------|----------------------|--------------------------|------------------|
| Standard (LTG1) | 7.25 W/ft            | 665 lm/ft                | 86 LPW           |
| Low (LTG2)      | 5 W/ft               | 475 lm/ft                | 90 LPW           |
| High (LTG3)     | 10 W/ft              | 910 lm/ft                | 84 LPW           |

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



- |                                  |   |   |   |  |   |
|----------------------------------|---|---|---|--|---|
| <b>1 - FIXTURE ID</b><br>PG2 LED | <b>2 - LENGTH</b><br>2 - 2 ft<br>4 - 4 ft<br>8 - 8 ft<br>X'-X" - Specify Length | <b>3 - COLOR TEMP</b><br>27 - 2700K/90 CRI<br>30 - 3000K/90 CRI<br>35 - 3500K/90 CRI<br>40 - 4000K/90 CRI<br>TW* - Tunable White<br>RGBW** - RGB + 3000K<br>*Must use DMX or TW10 Driver<br>**Must use DMX Driver | <b>4 - LED SYSTEM</b><br>LTG1 - Standard<br>LTG2 - Low<br>LTG3 - High<br>LTGC - Custom Output | <b>5 - VOLTAGE</b><br>UNV - Universal (120/277V) | <b>6 - DRIVER</b><br>DB - Standard Dimming (0-10V)<br>DB1% - 1% Dimming (0-10V)<br>DB.1% - 0.1% Dimming (0-10V)<br>LTEA - Lutron 2-wire 1% Dimming (120V only)<br>LDE1 - Lutron Digital EcoSystem<br>LDE5 - 5 Series EcoSystem; 5% Dimming<br>PoE - Power over Ethernet. Consult Factory for Compatibility<br>DMX - For Color Tuning and RGBW (Remote)<br>TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control) |
|----------------------------------|---|---|---|--|---|

- |   |   |  |
|---|---|--|
| <b>7 - FINISH</b><br>W - White (Standard)<br>CC - Custom Color (provide RAL#) | <b>8 - MOUNTING</b><br>T - 9/16" Tee Grid<br>T15 - 15/16" Tee Grid<br>NT - Spackle Flange | <b>9 - REGRESS</b><br>1"<br>2"<br>3"<br>4" |
|---|---|--|

DATE


PROJECT

FIRM

TYPE

## MOUNTING OPTIONS

**NT - No Trim**

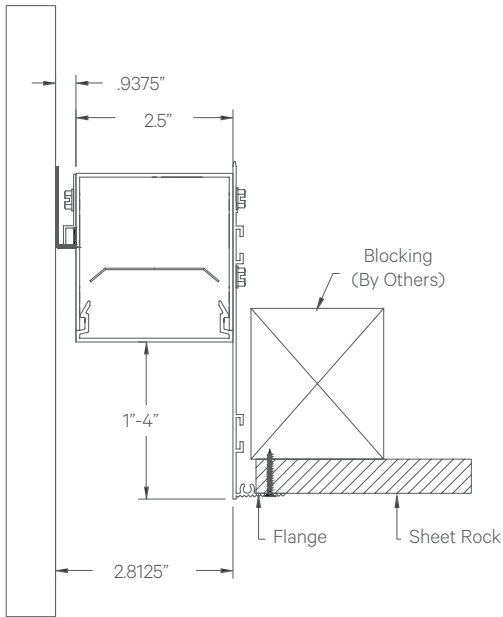

**F - Flange**

