


DATE _____ PROJECT _____ FIRM _____ TYPE _____

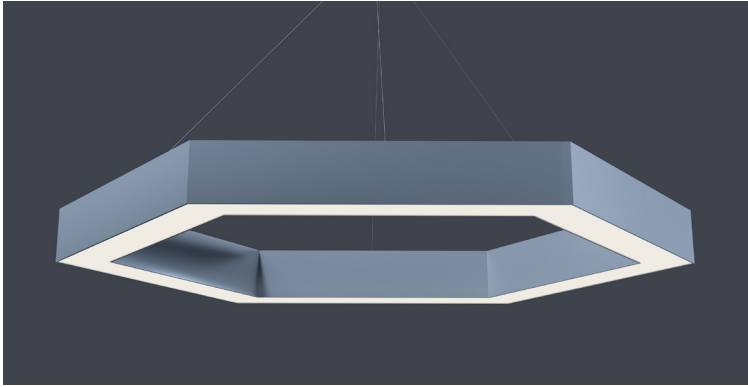

Performance decorative, hexagon-pattern pendant luminaire with small profile using 'Power Over Wire' system, eliminating power feed cord by combining the aircraft cable and power feed.

FEATURES

- Narrow, 1.9" Extrusion
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Welded Extruded Aluminum Housing with Formed Steel Gear Tray | **OPTICS** Extruded High Transmission Satin Acrylic Lens with No LED Imaging.

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed. Several Driver Options Available

EXTRUSION DIMENSIONS

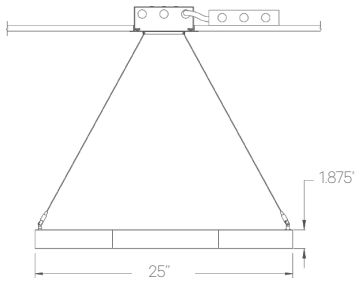

*Drawing reflects widest side of fixture. Alternate side is 21.75" in width.

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	42 W	3,150 lm	80 LPW
Low (LTG2)	33 W	2,210 lm	82 LPW
High (LTG3)	65 W	4,375 lm	75 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8

- 1 - FIXTURE ID**
HEX
- 2 - SIZE**
2ft
- 3 - COLOR TEMP**
27 - 2700K/90 CRI
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI
50 - 5000K/90 CRI
TW* - Tunable White
RGBW** - RGB + 3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver
- 4 - LED SYSTEM**
LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output
- 5 - VOLTAGE**
UNV - Universal (120/277V)
- 6 - DRIVER**
DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
PoE - Power over Ethernet. Consult Factory for Compatibility
DMX - For Color Tuning and RGBW (Remote)
TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

- 7 - FINISH**
W - White (Standard)
BLK* - Black
CC* - Custom Color (provide RAL#)
- 8 - OTHER OPTIONS (Remote)**
EM 120V - Emergency Pack
EM 277V - Emergency Pack
EMCKT - Emergency Circuit

*White cord and canopy provided. Must specify for other requests.