


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

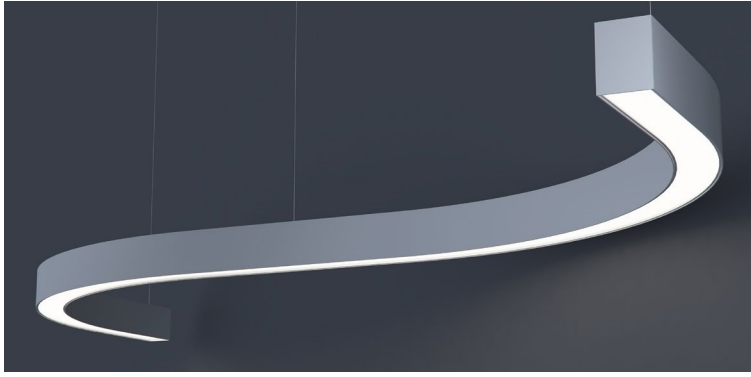

### FEATURES

- Available In Made To Measure Lengths Accurate Up To 1/16"
- Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE- [See More](#)

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

**FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**CONSTRUCTION** Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray

**OPTICS** Extruded High Transmission Satin Acrylic Lens with No LED Imaging. Additional Optics Available




### DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS



### LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens		Nominal Efficacy
	DIRECT	INDIRECT	DIRECT	INDIRECT	
Standard (LTG1)	7W/ft	7 W/ft	575 lm/ft	685 lm/ft	90 LPW
Low (LTG2)	5 W/ft	5 W/ft	400 lm/ft	495 lm/ft	90 LPW
High (LTG3)	9.5 W/ft	9.5 W/ft	725 lm/ft	890 lm/ft	85 LPW

Based on a 90 CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



#### 1 - FIXTURE ID

LS CURVE UP/DN

#### 2 - SIZE

90°  
135°  
X° - Custom Angle

#### 3 - CONFIGURATION

Drawing Required  
Consult Factory  
See page 2

#### 4 - COLOR TEMP

27 - 2700K/90 CRI  
30 - 3000K/90 CRI  
35 - 3500K/90 CRI  
40 - 4000K/90 CRI  
50 - 5000K/90 CRI

#### 5 - LED SYSTEM

**IN - INDIRECT**  
LTG1 - Standard  
LTG2 - Low  
LTG3 - High  
LTGC - Custom Output

**D - DIRECT**  
LTG1 - Standard  
LTG2 - Low  
LTG3 - High  
LTGC - Custom Output

#### 6 - VOLTAGE

UNV - Universal (120/277V)  
347V\* - 347V  
\*Must use DB Driver

### 7 - DRIVER

DB - Standard 1% Dimming (0-10V)  
DB.1% - 0.1% Dimming (0-10V)  
ELV-TRI - 2-wire 1% Dimming (120V only)  
ELV and TRIAC Compatible  
LDE1 - Lutron Digital EcoSystem  
DALI - DALI-2 Driver  
JA8 - JA8 Compliant 1% Dimming (0-10V)  
PoE - Power over Ethernet. Consult Factory for Compatibility  
PSQ - Lutron 0-10V For Color Tuning

### 8 - FINISH

W - White (Standard)  
BLK\* - Black  
CC\* - Custom Color (provide RAL number\*\*)  
CWF\* - Custom Wood Finish (provide color\*\*)

\*White cord and canopy provided. Must specify for other requests.  
\*\*(See [here](#) for finish options)

### 9 - MOUNTING

AC - Air Craft Cable (50")  
PS-X\* Pendant Stem (12", 18", 24", 36", 48")

\*White stems and canopy provided. Must specify for other requests.

### 10 - SENSORS & CONTROLS (OPTIONAL)

EIS - Enlighted Sensor  
WISD - Wattstopper Daylight Sensor  
WISM - Wattstopper Occupancy Sensor  
ECS - Eaton WaveLinX Sensor  
ACM - Acuity nLight Module Only  
ACS - Acuity nLight Sensor  
CCS - Casambi Module

### 11 - CIRCUIT (OPTIONAL)

DC\* - Dual Circuit (Separate Up/Dn Control)  
EM 120V - Emergency Pack  
EM 277V - Emergency Pack  
EMCKT - Emergency Circuit  
\*Requires additional power feeds; consult factory.

NOTE: For other control systems not listed consult factory.

Updated: 06/30/2021


DATE

PROJECT

FIRM

TYPE

### DIMENSIONS

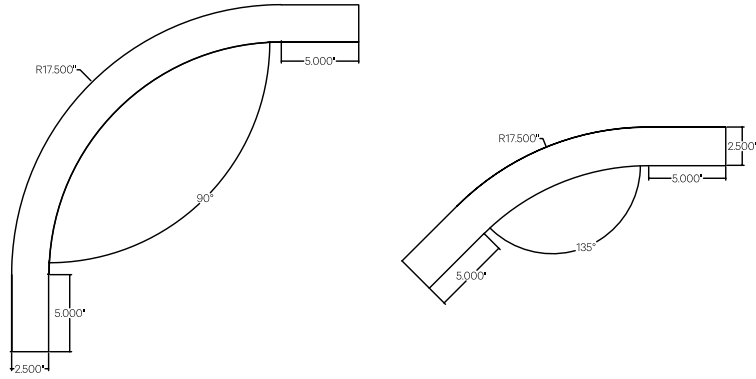

### EXAMPLE PATTERNS

