


DATE _____ PROJECT _____ FIRM _____ TYPE _____

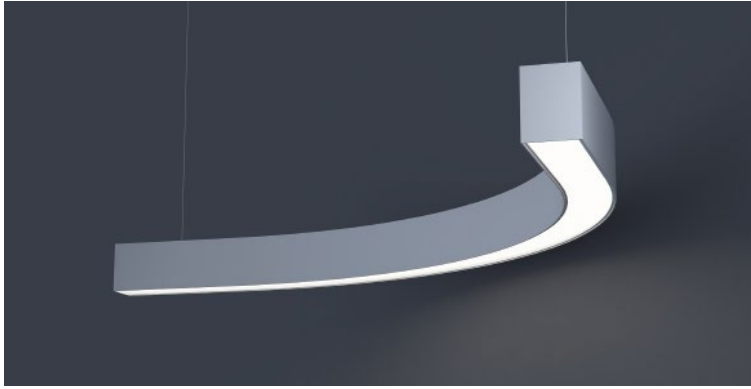

90° and 135° curved luminaire with small profile providing continuous light and direct/indirect illumination. Configurable into several patterns. For indoor applications. Suspended or surface mount installation.

FEATURES

- Available In Made To Measure Lengths Accurate Up To 1/16"
- Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray | **OPTICS** Extruded High Transmission Satin Acrylic Lens with No LED Imaging. Additional Optics Available

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens		Nominal Efficacy
	DIRECT	INDIRECT	DIRECT	INDIRECT	
Standard (LTG1)	7W/ft	7 W/ft	575 lm/ft	685 lm/ft	96 LPW
Low (LTG2)	4.75 W/ft	4.75 W/ft	400 lm/ft	495 lm/ft	98 LPW
High (LTG3)	9.5 W/ft	9.5 W/ft	725 lm/ft	890 lm/ft	94 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 IN - 5-INDIRECT D - 5-DIRECT 6 7 8 9 10 11

1 - FIXTURE ID LS CURVE UPDN | **2 - SIZE** 90° 135° | **3 - CONFIGURATION** Drawing Required Consult Factory See page 2 | **4 - COLOR TEMP** 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K | **5 - LED SYSTEM** IN - INDIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output | D - DIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output | **6 - VOLTAGE** UNV - Universal (120/277V)

NOTE: Outputs vary using RGBW and TW.

*Must use DMX or TW10 Driver
**Must use DMX Driver

7 - DRIVER DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

8 - FINISH W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL number**) CWF* - Custom Wood Finish (provide color**)

9 - MOUNTING AC - Air Craft Cable (50")

10 - CONTROL (Optional) EIS - Enlighted Sensor WISM - Wattstopper Daylight Sensor WISM - Wattstopper Occupancy Sensor SLS - SensiLUM Sensor ACS - Acuity Controls nLight System CCS - Casambi Compatible ECS - Eaton WaveLinX System

11 - CIRCUIT (OPTIONAL) DC* - Dual Circuit (Separate Up/Dn Control) EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit

*Requires additional power feeds; consult factory.
*For other control systems not listed consult factory.

Updated: 02/28/2020



DATE

PROJECT

FIRM

TYPE

DIMENSIONS

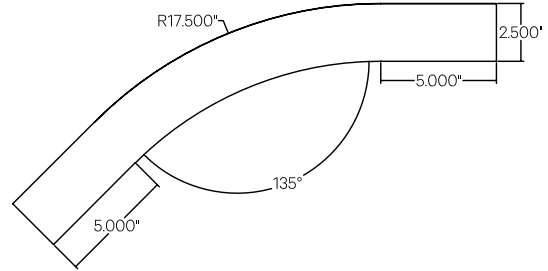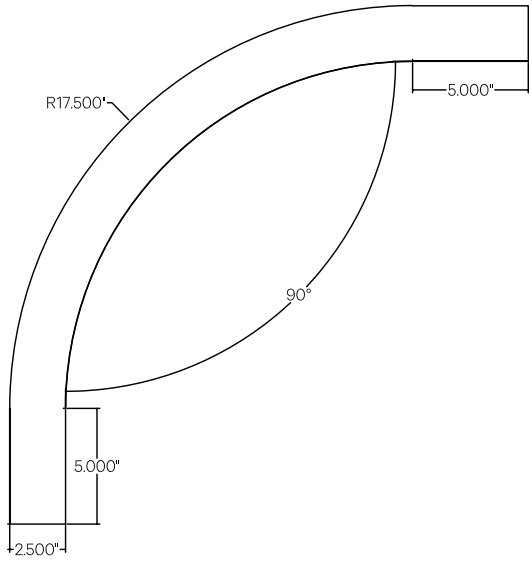

EXAMPLE PATTERNS

