

Lucie direct



Create a luminous ceiling with our back-lit, projection fabric luminaire. Standard or custom sizes are available to suit any modern space.


Features

- Extruded recycled aluminum housing
- Aluminum core LED boards
- Specifiable color temperature. CRI > 90, R9 >50
- Custom sizes and finishes available
- Integral specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty
- WELL Building Standard compatible [learn more](#)


Dimensions




Optics



low



medium

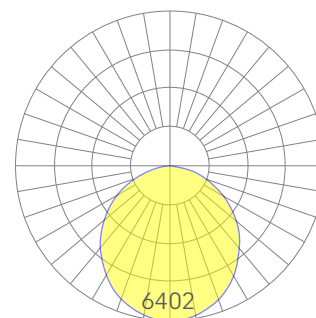

high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Ordering Information



Example: LUCIE - 2X4 - 35 - MED - UNV - DB - W - AC - SD - CCS - DAYCKT - NA

Fixture ID	1	Size	2	Color Temperature	3	Output	4
LUCIE		2x4 4x4 4x8 4x12 8x8 8x12 8x16		27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI 50 5000K/90 CRI WD ¹ Warm Dim 2200K-3000K TW ² Tunable white 2700K-6500K RGBW30 ³ RGB +white, 3000k RGBW35 ³ RGB +white, 3500k RGBW40 ³ RGB +white, 4000k		27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI 50 5000K/90 CRI TW ² Tunable white 2700K-6500K RGBW30 ³ RGB +white, 3000k RGBW35 ³ RGB +white, 3500k RGBW40 ³ RGB +white, 4000k	
Voltage	5	Driver	6	Finish	7	Mounting	8
UNV 347V ¹ Universal (120/277V) 347V		DB Standard 0-10V 1% DB.1% 0-10V 0.1% ELV 2-wire 1% (120V only) TRI Forward phase (120V only) LDE1 Lutron Digital EcoSystem DALI DALI-2 Driver PoE Power over Ethernet. DMX ¹ DMX512		W White BLK Black CC ¹ Custom Color		AC Aircraft Cable (50") SM Surface Mount	
Optics	9	Sensors/Controls	10	Circuit	11	Options	12
SD Standard Diffuser		NA None ACM Acuity nLight Module Only CCS Casambi Module		NA None EMCKT Emergency Circuit DAYCKT Daylight Circuit		NA None	

Performance

Output ¹	Watts	Lumens
Low	160	8841
Medium	232	12447
High	320	16653

¹Based on a typically configured, 4x8, 90 CRI, 3500K luminaire using four drivers.

Custom outputs available. Please consult factory.
For 4000K multiply by 105, for 3000K 0.9%, for 2700K, 0.92.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Modification date: October, 2021

Page 2 of 4

Lucie direct

Drivers & Electrical

Integral drivers* with 0-10V Dimming standard. Several other driver options available; see ordering information.

*DMX drivers are provided in remote enclosures.

Controls

Control modules may be mounted within luminaires or remotely.

Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox. Consult Factory for systems not listed, See [here](#) for more info.

Weight

3 lbs per square foot

Optics

Luminous projection fabric provides excellent diffusion, high transmission, and no LED imaging.

Construction

Housings are extruded, recycled aluminum. Individual fixtures are available up to 16' long and may be specified as nominal or precision lengths. Precision lengths are supplied within 1/8" tolerance.


Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.


Mounting Options

Custom mounting types and ceiling transitions available; consult factory.

Aircraft cable

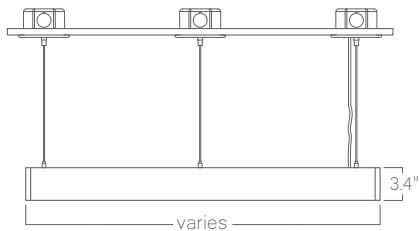


front view

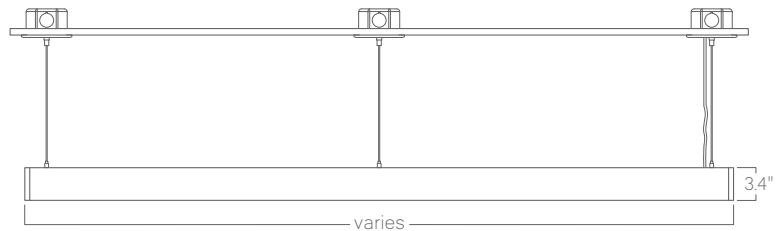


side view

Surface mount



front view



side view