

Adjustable Downlight recessed




Adjustable, four-optic downlight module available with several beam spreads.


Features

- Four beam spreads available
- 8" in length
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

Dimensions

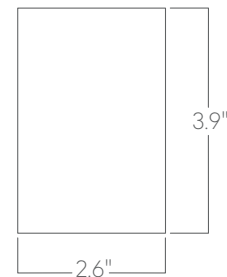

Optics

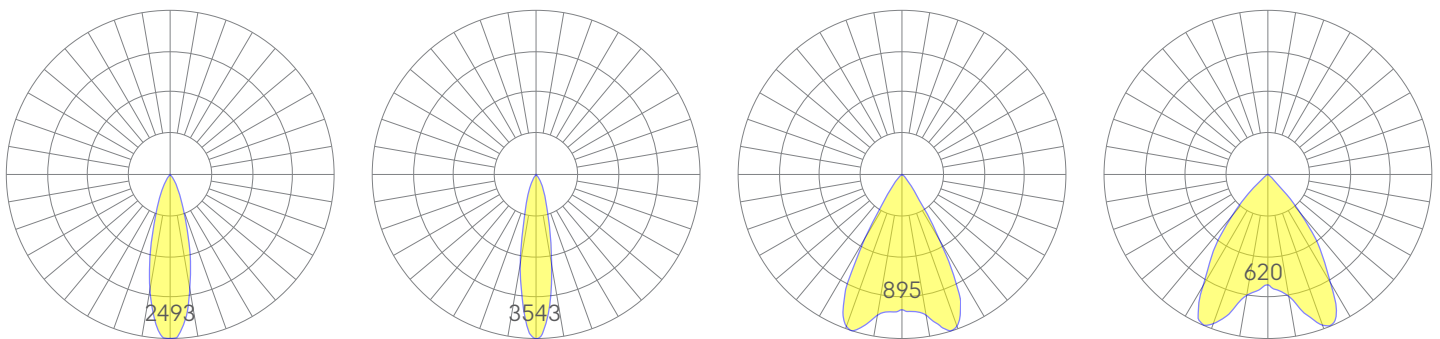

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Adjustable Downlight recessed

Ordering Information

- - - - - - -

1 2 3 4 5 6 7 8

Example: DL ADJ SA - 35 - MED - W - DB - UNV - SM - WFL - W

Fixture ID <input type="text" value="1"/>	Color Temperature <input type="text" value="2"/>	Output <input type="text" value="3"/>	Driver <input type="text" value="4"/>
DLR ADJ SA	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI	LOW Low output MED Medium output HIGH High output	DB¹ Standard 0-10V 1% DB.1%² 0-10V 0.1% PoE³ Power over Ethernet
Voltage <input type="text" value="5"/>	Mounting <input type="text" value="6"/>	Beam Spread <input type="text" value="7"/>	Finish <input type="text" value="8"/>
UNV Universal (120/277V)	NT Mud-in Flange	SP 20° Beam; 3569 CBCP FL 30° Beam; 2542 CBCP WFL 62° Beam; 702 CBCP XWFL 80° Beam; 379 CBCP	BLK Black W White

¹Driver housed in canopy
²Driver housed in remote enclosure
³Housing varies. Consult factory

*Trim is white, nodes and plate must be black.

Performance

Output ¹	Watts	Lumens
Low	9	562
Medium	12	728
High	16.75	908

Based on 'SP' beam spread, 90 CRI, 3500K luminaire using one driver.

¹For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92