

Adjustable Downlight




Adjustable, four-optic downlight module is available with several beam spreads.


Features

- Patented product
- Four beam spreads available
- Beams adjustable up to 30° in all directions
- 8" in length
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 > 50
- 5 Year, 50,000 hour warranty, damp location rated

Dimensions



Optics

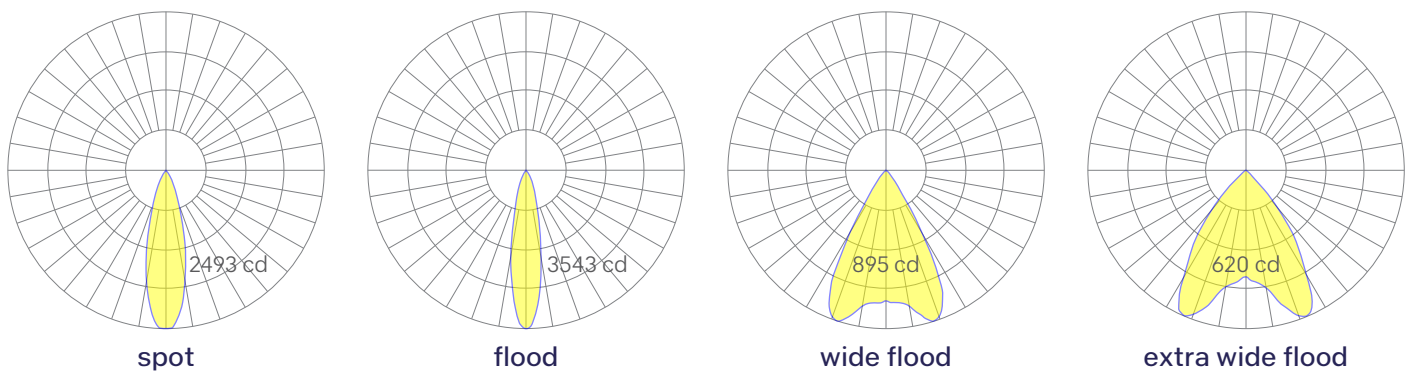

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Modification date: February, 2025

Page 1 of 2

Adjustable Downlight

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Color Temperature	3	Output	4	Driver
	DL.ADJ.SA	27	2700K/90 CRI	LOW	Low output	DB	Standard 0-10V 1% Remote, for driver box sizes, click here
		30	3000K/90 CRI	MED	Medium output	DB.1%	0-10V 01% Remote, for driver box sizes, click here
		35	3500K/90 CRI	HIGH	High output	PoE	Power over ethernet. Remote, for driver box sizes, click here
		40	4000K/90 CRI				
5	Voltage	6	Mounting	7	Beam Spread	8	Finish
	UNV Universal (120/277V)	SM	Surface Mount downward facing optic only	SP	20° Beam; 3569 CBCP	BLK	Black
		PS.X	Pendant Stem (12", 18", 24", 36", 48") White stems, canopies and power cord unless option specified in section 12.	FL	30° Beam; 2542 CBCP	W	White Trim is white, nodes and plate must be black.
				WFL	62° Beam; 702 CBCP		
				XWFL	80° Beam; 379 CBCP		

Performance

Output ¹	Watts/ft	Lumens/ft
Low	9	562
Medium	12	728
High	16.75	908

¹Based on SP beam spread, 90 CRI, 3500K luminaire using one driver.
For 4000K multiply by 1.05; for 3000K, 0.9%; for 2700K, 0.92.

Technical Information



click [here](#) or
scan QR code

Wiring diagrams, PoE and sensor details