

DATE	PROJECT	FIRM	TYPE
------	---------	------	------



### FEATURES

- 4-Optic Adjustable Downlight Module with 360° Rotation and 30° Tilt Capability
- 8 inches in Length
- Customizable Placement (Consult Factory; Drawing Required)
- Four Beam Spreads Available
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE- [See More](#)

**APPLICATIONS** Commerical Interiors, Galleries, Retail, Museums, Reception Areas, Hotels, Restaurants

**FINISH** Powder-Coated Black Standard. Optional White Powder-Coated Finish. Custom RAL Colors Available. Louver Available in Black Only.

**CONSTRUCTION** Die Cast and Formed Sheet Metal.

**OPTICS** Custom Designed TIR Optic. Four Optional Beam Spreads.




### DRIVERS, SENSORS, & POE

For Wiring Diagrams, POE, and Sensor Information Click [Here](#)



**ELECTRICAL** 0-10V Remote Driver Standard.

### LIGHT DISTRIBUTION

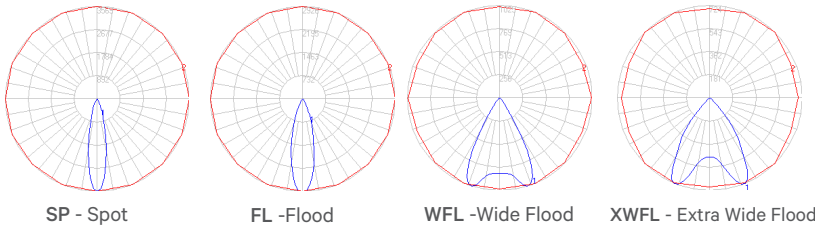

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	12 W	728 lm
Low (LTG2)	9 W	562 lm
High (LTG3)	16.75W	908 lm

NOTE: Based on single module using 'SP' option in 90CRI, 3500K

### ORDERING



#### 1 - FIXTURE ID

DLR ADJ -SA

#### 2 - QUANTITY

S - Single  
D - Dual

#### 3 - COLOR TEMP

27 - 2700K/90 CRI  
30 - 3000K/90 CRI  
35 - 3500K/90 CRI  
40 - 4000K/90 CRI

#### 4 - LED SYSTEM

LTG1 - Standard  
LTG2 - Low  
LTG3 - High

#### 5 - VOLTAGE

UNV - Universal (120/277V)  
347V\* - 347V  
\*Must use DB Driver

#### 6 - DRIVER (Remote)

DB - Standard 1% Dimming (0-10V)  
DB.1% - 0.1% Dimming (0-10V)  
DALI - DALI-2 Driver  
PoE - Power over Ethernet. Consult Factory for Compatibility

#### 7 - BEAM SPREAD

SP -20° Beam; 3569 CBCP  
FL - 30° Beam; 2542 CBCP  
WFL - 62° Beam; 702 CBCP  
XWFL - 80° Beam; 379 CBCP

#### 8 - MOUNTING

NT - Mud-in Flange

#### 9 - FINISH

BLK - Black (Standard)  
CC - Custom Color (provide RAL#)

#### 10 - CIRCUIT (Optional)

EM 120V - Emergency Pack  
EM 277V - Emergency Pack  
EMCKT - Emergency Circuit


DATE

PROJECT


FIRM

TYPE


### DIMENSIONS



**Cross Section View**

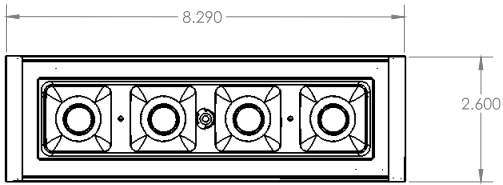

**Bottom View - Single**

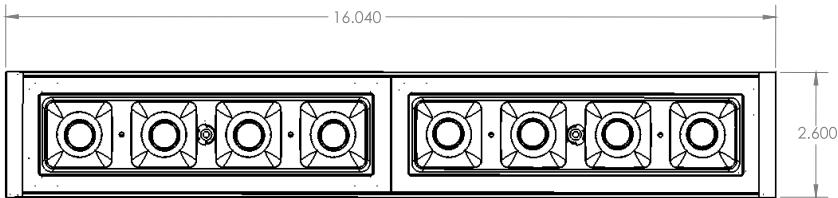

**Bottom View - Dual**