

DATE _____ PROJECT _____ FIRM _____ TYPE _____



FEATURES

- Fixed 4-Optic Downlight Module with Specially Designed Wall Wash Optic
- 8 inches in Length
- Optics Optimized for 1:1 Wall Wash (ie - 30" from wall, 30" on center)
- Customizable Placement (Consult Factory; Drawing Required)
- CRI 90+ Standard; R9>50
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- 5 Year, 50,000 Hour Fixture Warranty
- Available with PoE- [See More](#)

APPLICATIONS Commerical Interiors, Galleries, Retail, Museums, Reception Areas, Hotels, Restaurants

FINISH Powder-Coated Black Standard. Optional White Powder-Coated Finish. Custom RAL Colors Available. Louver Available in Black Only.

CONSTRUCTION Die Cast and Formed Sheet Metal.

OPTICS Custom Tuned Optics to Provide 1:1 Wall Wash




DRIVERS, SENSORS, & POE

For Wiring Diagrams, POE, and Sensor Information Click [Here](#)



ELECTRICAL 0-10V Remote Driver Standard.

LIGHT DISTRIBUTION

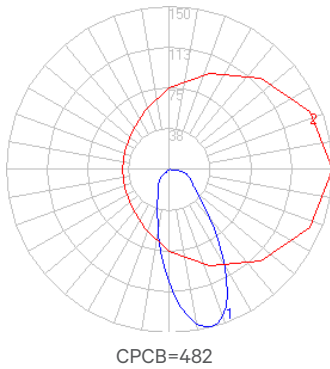

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	12 W	420 lm
Low (LTG2)	9 W	324 lm
High (LTG3)	16.75W	524 lm

NOTE: Based on a single module using 'SP' option in 90CRI, 3500K

ORDERING

1 2 3 4 5 6 7 8 9

1 - FIXTURE ID

DLR WW -SA

2 - QUANTITY

S - Single
D - Dual

3 - COLOR TEMP

27 - 2700K/90 CRI
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI

4 - LED SYSTEM

LTG1 - Standard
LTG2 - Low
LTG3 - High

5 - VOLTAGE

UNV - Universal (120/277V)
347V* - 347V
*Must use DB Driver

6 - DRIVER (Remote)

DB - Standard 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
DALI - DALI-2 Driver
PoE - Power over Ethernet. Consult Factory for Compatibility

7 - MOUNTING

NT - Mud-in Flange

8 - FINISH

BLK - Black (Standard)
CC - Custom Color (provide RAL#)

9 - CIRCUIT (Optional)

EM 120V - Emergency Pack
EM 277V - Emergency Pack
EMCKT - Emergency Circuit


DATE

PROJECT


FIRM

TYPE


DIMENSIONS



Cross Section View

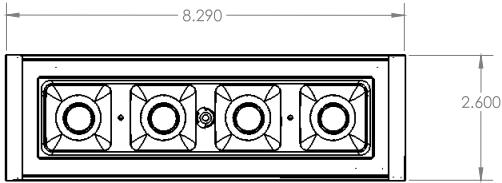

Bottom View - Single

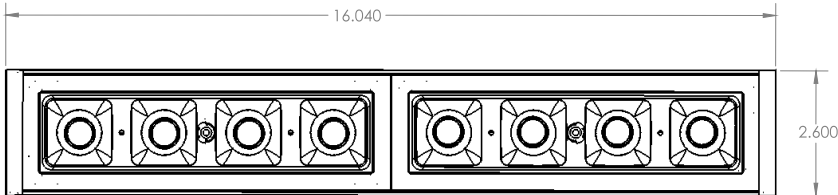

Bottom View - Dual