

# Fixed Downlight recessed




Fixed, four-optic downlight module available with several beam spreads.


## Features

- Four beam spreads available
- 8" in length
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

## Dimensions



## Optics

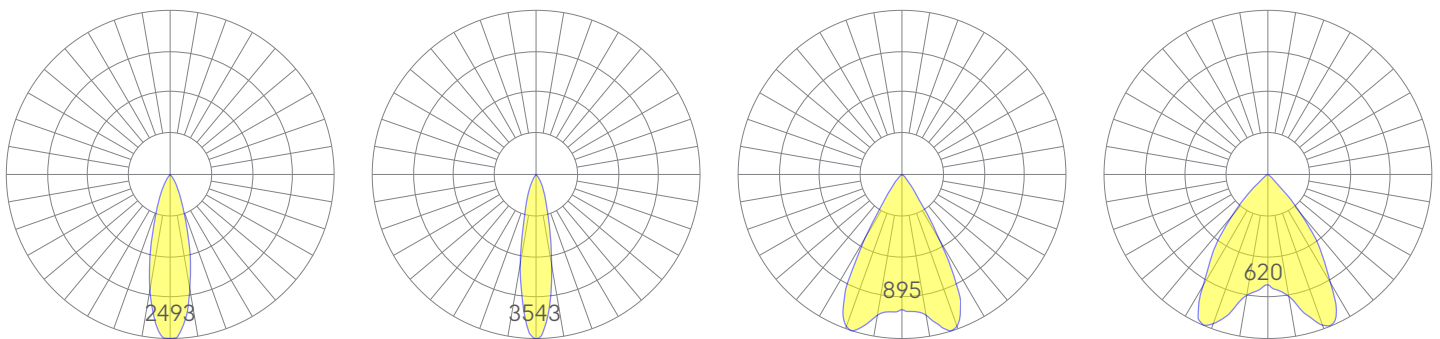

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Fixed Downlight recessed

## Ordering Information



Example: DLR FIX SA - 35 - MED - W - DB - UNV - SM - WFL - W

Fixture ID	1	Color Temperature	2	Output	3	Driver	4
DLRFIX SA		<b>27</b> 2700K/90 CRI <b>30</b> 3000K/90 CRI <b>35</b> 3500K/90 CRI <b>40</b> 4000K/90 CRI		<b>LOW</b> Low output <b>MED</b> Medium output <b>HIGH</b> High output		<b>DB<sup>1</sup></b> Standard 0-10V 1% <b>DB.1%<sup>2</sup></b> 0-10V 0.1% <b>PoE<sup>3</sup></b> Power over Ethernet	
						<small><sup>1</sup>Driver housed in canopy.  <sup>2</sup>Driver housed in remote enclosure.  <sup>3</sup>Housing varies. Consult factory.</small>	
Voltage	5	Mounting	6	Beam Spread	7	Finish	8
UNV Universal (120/277V)		NT Mud-in Flange		<b>SP</b> 20° Beam; 3569 CBCP <b>FL</b> 30° Beam; 2542 CBCP <b>WFL</b> 62° Beam; 702 CBCP <b>XWFL</b> 80° Beam; 379 CBCP		<b>BLK</b> Black <b>W</b> White	
						<small><sup>1</sup>Trim is white, nodes and plate must be black.</small>	

## Performance

Output <sup>1</sup>	Watts	Lumens
Low	9	562
Medium	12	728
High	16.75	908

Based on 'SP' beam spread, 90 CRI, 3500K luminaire using one driver.

<sup>1</sup>For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92.