


DATE _____ PROJECT _____ FIRM _____ TYPE _____

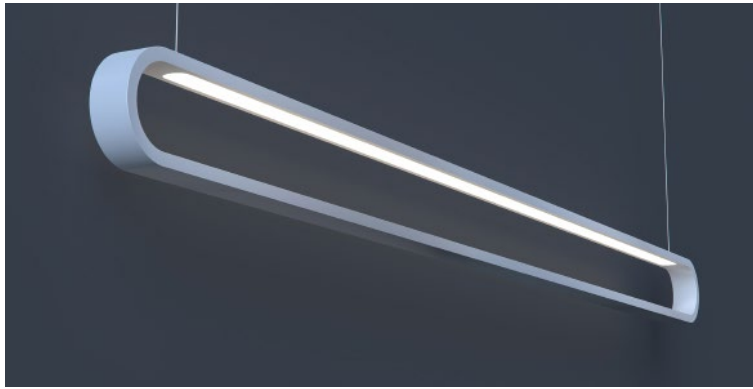

FEATURES

- Narrow, Oval-Shaped Luminaire with Inner Illumination on Both Sides
- Can be Suspended Vertically or Horizontally
- Side Profile is 1-3/8" in Width
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

FINISH Standard Powder-Coated White. Custom RAL Colors Available

CONSTRUCTION Fixture has an Extruded Aluminum Rolled and Welded Housing

OPTICS Laser Cut Acrylic Lens

FIXTURE RATINGS & CERTIFICATIONS Union Made Made In The USA
ETL Listed Damp Location Rated



DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	6.75 W/ft	475 lm/ft
Low (LTG2)	4 W/ft	285 lm/ft
High (LTG3)	9.5 W/ft	660 lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING



1 - FIXTURE ID

OVALO

2 - LENGTH

- 2 - 2 ft
- 3 - 3 ft
- 4 - 4 ft
- 6 - 6 ft
- 8 - 8 ft

3 - COLOR TEMP

- 27 - 2700K/90 CRI
- 30 - 3000K/90 CRI
- 35 - 3500K/90 CRI
- 40 - 4000K/90 CRI

4 - LED SYSTEM

- LTG1 - Standard
- LTG2 - Low
- LTG3 - High
- LTGC - Custom Output

5 - VOLTAGE

UNV - Universal (120/277V)

6 - DRIVER (REMOTE)

- DB - Standard Dimming (0-10V)
- DB1% - 1% Dimming (0-10V)
- DB.1% - 0.1% Dimming (0-10V)
- LTEA - Lutron 2-wire 1% Dimming (120V only)
- LDE1 - Lutron Digital EcoSystem
- LDE5 - 5 Series EcoSystem; 5% Dimming
- PoE - Power over Ethernet. Consult Factory for Compatibility

7 - FINISH

- W - White (Standard)
- BLK* - Black
- CC* - Custom Color (provide RAL number**)

8 - MOUNTING

- ACP-V - Air Craft Cable Vertical Mount (50°)
- ACP-H - Air Craft Cable Horizontal Mount (50°)

11 - CIRCUIT (REMOTE)

- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit

*White cord and canopy provided. Must specify for other requests.
**(See [here](#) for finish options)

DATE


PROJECT

FIRM

TYPE

MOUNTING OPTIONS

ACP-V - Air Craft Cable Vertical Mount

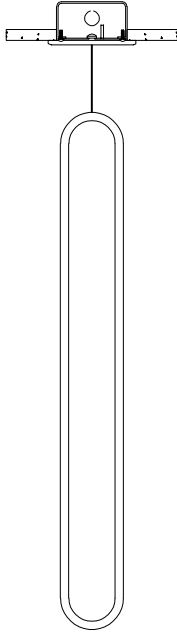

ACP-H - Air Craft Cable Horizontal Mount

