

Our Performance Decorative luminaires offer a variety of decorative forms and sizes, suitable for any modern space.


Features

- Power Over Wire system eliminates power cord
- Bidirectional light distribution
- Rolled, welded, extruded recycled aluminum
- Specifiable color temperature. CRI > 90, R9 > 50
- Specifiable dimmable drivers or PoE
- Custom colors and wood finishes available
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)


Dimensions




Optics



low



medium



high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	OVALO	2	2 ft nominal length	27	2700K/90 CRI	LOW	Low output
		3	3 ft nominal length	30	3000K/90 CRI	MED	Medium output
		4	4 ft nominal length	35	3500K/90 CRI	HIGH	High output
		6	6 ft nominal length	40	4000K/90 CRI	CUST	Custom output Specify watts or lumens
		8	8 ft nominal length				
5	Voltage	6	Driver	7	Finish	8	Mounting
UNV	Universal (120/277V)	DB	Standard 0-10V 1%	W	White	ACP-H	Power Over Aircraft Cable Horizontal suspension, 5" canopy White canopies provided unless option specified in section 12.
347V	347V Available for DB driver only	DB.1%	0-10V 0.1%	BLK	Black	ACPH3.5	Power Over Aircraft Cable Horizontal suspension, 3.5" canopy. Adaptor must be mudded in. White canopies provided unless option specified in section 12.
		ELV	Reverse Phase 1% (120V only) For compatible dimmers, click here .	SLV	Silver	ACP-V	Power Over Aircraft Cable Vertical suspension, 5" canopy White canopies provided unless option specified in section 12.
		TRI	Forward phase (120V only) For compatible dimmers, click here .	CC	Custom Color See finish options here .	ACPV3.5	Power Over Aircraft Cable Vertical suspension, 3.5" canopy Adaptor must be mudded in. White canopies provided unless option specified in section 12.
		LDE	Lutron Digital EcoSystem	CWF	Custom Wood Finish See finish options here .		
		DALI	DALI-2 Driver				
		PoE	Power over Ethernet.				
		DMX	DMX512 All DMX drivers set to default address 001 and provided in remote enclosures. Contact us for other addressing needs.				
			All drivers provided in remote enclosures				
9	Optics	10	Sensors/Controls	11	Circuit	12	Options
SD	Standard Diffuser	NA	None	NA	None	STD	White canopy + white cord
		ACM	Acuity nLight Module Only	EMPCK	Emergency battery pack	CAN-X	Canopy + color See finish options here .
		CCS	Casambi Module	EMCKT	Emergency circuit May require additional power feeds.	SJ-BLK	Black cord
		AWNDR	Lutron Athena Wireless Node Module	DAYCKT	Daylight circuit May require additional power feeds.	SJ-WHT	White cord
		OTHER	Consult Factory				

Performance

Output ¹	Watts/ft	Lumens/ft
Low	4	283
Medium	7	472
High	10	660

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.
Custom outputs available. Please consult factory.
For 4000K multiply by 1.05, for 3000K, 0.9, for 2700K, 0.92.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Drivers & Electrical

Our Power Over Wire system delivers power to the luminaire via suspension cables, eliminating a separate power feed. Drivers are housed in factory supplied remote enclosures¹. All drivers are dimmable.

¹See order information for more details. For remote driver box sizes, click [here](#).

Emergency Back-Up

Emergency battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.

Consult factory for systems not listed. See [here](#) for more info.

Weight

2 lbs per foot

Optics

Laser-cut acrylic lenses provide excellent diffusion, high transmission, and no LED imaging.

Construction



Welded, rolled, extruded recycled aluminum.

Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.

Mounting Options

Power over aircraft cable - horizontal mount

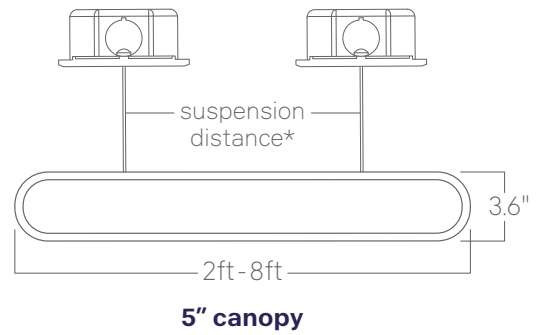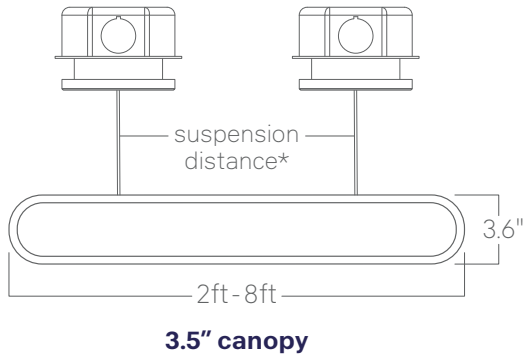

*Suspension distances for horizontal mounting:

2ft	3ft	4ft	6ft	8ft
23.3"	34.9"	46.4"	69.2"	92.0"

Power over aircraft cable - vertical mount

