

Wall Wash Downlight




Fixed, four-optic downlight module with specially designed wall wash optic.


Features

- 482 CBCP
- Optimized for 1:1 spacing (ie-30" from wall, 30" on center)
- 8" in length
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

Dimensions



Optics

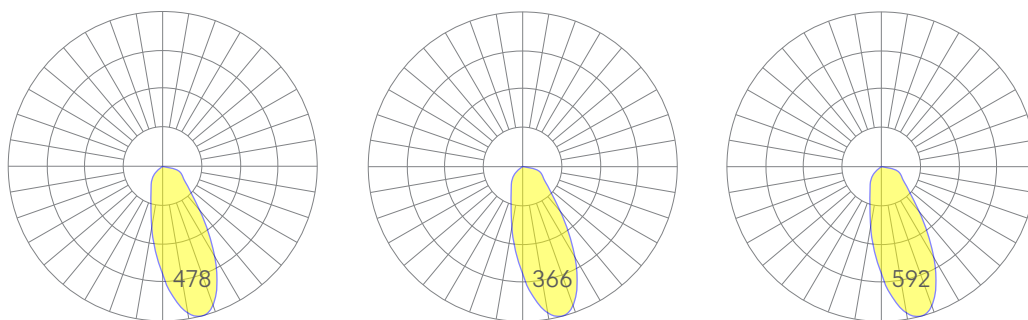

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Wall Wash Downlight

Ordering Information

- - - - -
 1 2 3 4 5 6

Example: DL WW SA- 35 - MED - W - DB - SM - W

Fixture ID <input type="text"/>	Color Temperature <input type="text"/>	Output <input type="text"/>	Driver <input type="text"/>
DL WW SA	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI	LOW Low output MED Medium output HIGH High output	DB ¹ Standard 0-10V 1% DB.1% ² 0-10V 0.1% PoE ³ Power over Ethernet
Mounting <input type="text"/>	Finish <input type="text"/>		
SM Surface mount PS-X Pendant stem (12", 18", 24", 36", 48")	BLK Black W White		
<small>White stems and canopy provided. Must specify other requests.</small>	<small>*Trim is white, nodes and plate must be black.</small>		

Performance

Output ¹	Watts	Lumens
Low	9	324
Medium	12	420
High	16.75	524

Based on 'SP' beam spread, 90 CRI, 3500K luminaire using one driver.

¹For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92.