

Wall Wash Downlight recessed




Fixed, four-optic downlight module with specially designed wall wash optic.


Features

- 482 CBCP
- Optimized for 1:1 spacing (ie-30" from wall, 30" on center)
- 8" in length
- Extruded recycled aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

Dimensions



Optics

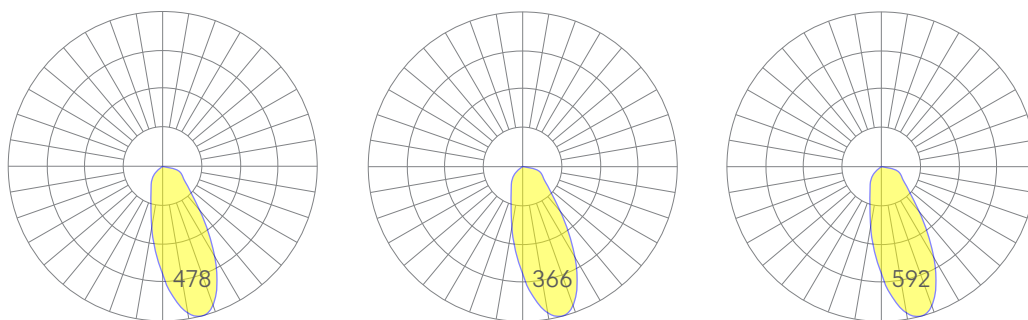

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Wall Wash Downlight recessed

Ordering Information



Example: DLR WW SA - 35 - MED - W - DB - UNV - SM - W

Fixture ID <input type="text" value="1"/>	Color Temperature <input type="text" value="2"/>	Output <input type="text" value="3"/>	Driver <input type="text" value="4"/>
DLR WW SA	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI	LOW Low output MED Medium output HIGH High output	DB ¹ Standard 0-10V 1% DB.1% ² 0-10V 0.1% PoE ³ Power over Ethernet
Voltage <input type="text" value="5"/>	Mounting <input type="text" value="6"/>	Finish <input type="text" value="7"/>	
UNV Universal (120/277V)	NT Mud-in Flange	BLK Black W White	

¹Driver housed in canopy.
²Driver housed in remote enclosure.
³Housing varies. Consult factory.

*Trim is white, nodes and plate must be black.

Performance

Output ¹	Watts	Lumens
Low	9	324
Medium	12	420
High	16.75	524

Based on 'SP' beam spread, 90 CRI, 3500K luminaire using one driver.

¹For 4000k, multiply by 1.05; for 3000k, 0.96; for 2700k, 0.92.