


Baffle module uses specially designed louver for 'quiet', but effective lighting


## Features

- Magnetically held and easily repositioned on site
- Available in lengths up to 8' (6" increments)
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

## Dimensions



## Optics

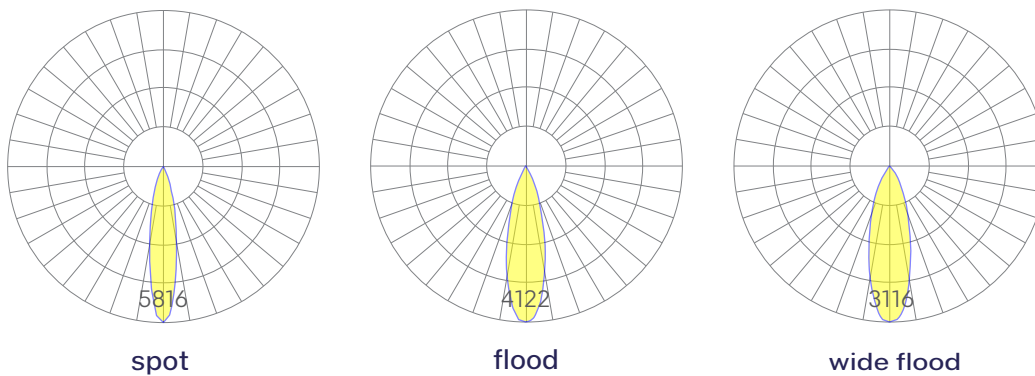

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Baffle module



## Ordering Information



Example: MAG-BAF - 2' - 35 - MED - W - SP - NA

Fixture ID	1	Length (Nominal)	2	Color Temperature	3	Output	4
<b>MAG-BAF</b>		<b>1</b> 1 ft <b>2</b> 2 ft <b>4</b> 4 ft <b>6</b> 6 ft <b>8</b> 8 ft <b>X'</b> Specify length  <small>*Custom lengths up to 8'. Specify to the nearest 6" increments.</small>		<b>27</b> 2700K/90 CRI <b>30</b> 3000K/90 CRI <b>35</b> 3500K/90 CRI <b>40</b> 4000K/90 CRI		<b>MED</b> Medium output	
Finish	5	Beam Spread	6	Circuit	7		
<b>W</b> White <b>BLK</b> Black <b>CC'</b> Custom Color		<b>SP</b> 20° Beam; 5816 CBCP <b>FL</b> 26° Beam; 4122 CBCP <b>WFL</b> 32° Beam; 3116 CBCP		<b>NA</b> None <b>EM120V</b> Emergency Pack <b>EM277V</b> Emergency Pack <b>EMCKT</b> Emergency Circuit			
<small>*Custom Color. See finish options <a href="#">here</a>.</small>				<small>*EM sections are fixed in position at the factory by code and must be marked on the submittal drawing.</small>			

## Performance

Output <sup>1</sup>	Watts/ft	Lumens/ft
Low	4	335
Medium	7	528
High	9	659

Based on a typically configured 90 CRI, 3500K luminaire using one driver.

<sup>1</sup>For 4000k, multiply by 1.05, for 3000k, 0.96, for 2700k, 0.92.