

Drop wide





Accent lighting, surface or suspended.


Features

- Extruded, recycled, premium aluminum housing
- Four beam spreads available
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty


Dimensions

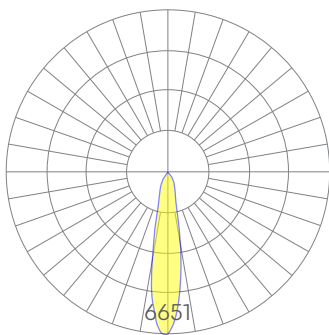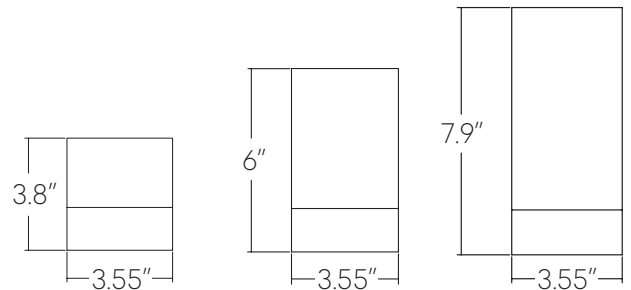


Spot

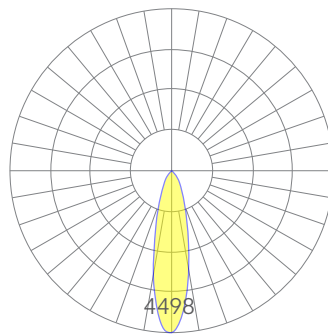

Medium

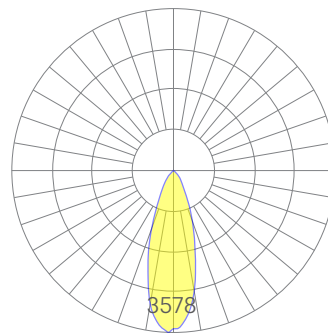

Flood

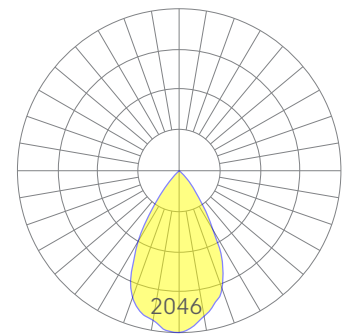


Wide Flood

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Drop wide

Ordering Information



Example: DROP - W - 4" - 35 - UNV - DB - WFL - W - CP - NA - HEX

Fixture ID	1	Length	2	Color Temperature	3	Voltage	4
DROP-W		4" 6" 8"		27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI		UNV Universal (120/277V)	
Driver	5	Beam Spread	6	Finish	7	Mounting	8
DB ¹ Standard 0-10V1%		SP 17° Beam; 7625 CBCP MED 21° Beam; 5059 CBCP FL 31° Beam; 2735 CBCP WFL 50° Beam; 1854 CBCP		BLK Black W White		CP Cable Pendant SM Surface Mount	
¹ Driver is integral unless specifying 4" length option							
Circuit	9	Other Options	10				
NA None EMCKT Emergency Circuit		NA None HEX Hex Louver					

Performance

Output ¹	Watts	Lumens
Spot	21	1527
Medium	21	1517
Flood	21	1565
Wide Flood	21	1772

¹Based on a typically configured 90 CRI, 3500K luminaire using one driver.

Custom outputs available. Please consult factory.
For 4000K multiply by 1.05, for 3000K 0.96, for 2700K, 0.92

Technical Information



click [here](#) or scan QR code


Wiring diagrams, PoE and sensor details

Modification date: May 2022


Page 2 of 3

Mounting Options

Custom mounting types and ceiling transitions available; consult factory.

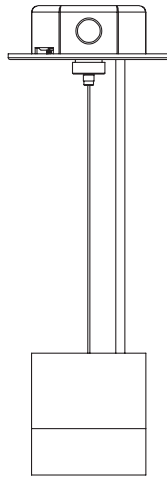

CP
Cable Pendant



SM
Surface Mount