

# UF018 module




An elegant, suspended, luminous disc with optional suspension lengths.


## Features

- Magnetically held and easily repositioned on site
- Pendant suspended (5", 10", or 20" lengths)
- Extruded, recycled, premium aluminum housing
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty

## Dimensions

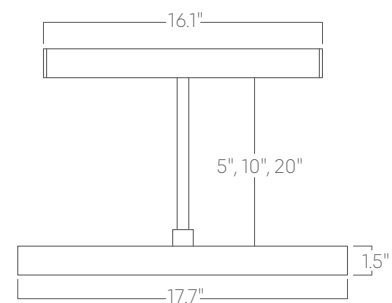

## Optics

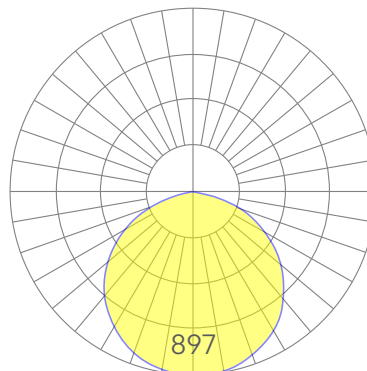

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# UF018 module



## Ordering Information

-  -  -  -   
 1                      2                      3                      4                      5

Example:                      MAG-UF018 - 35 - MED - BLK - 10"

<b>Fixture ID</b>	<input type="text" value="1"/>	<b>Color Temperature</b>	<input type="text" value="2"/>	<b>Output</b>	<input type="text" value="3"/>	<b>Finish</b>	<input type="text" value="4"/>
<b>MAG-UF018</b>		<b>27</b> 2700K/90 CRI <b>30</b> 3000K/90 CRI <b>35</b> 3500K/90 CRI		<b>MED</b> Medium output		<b>BLK</b> Black	
<b>Pendant Stem</b>	<input type="text" value="5"/>						
5" 10" 20"							

## Performance

Output <sup>1</sup>	Watts	Lumens
Medium	39	2667

Based on a typically configured 90 CRI, 3500K luminaire using one driver.

<sup>1</sup>For 3000k, 0.9%; for 2700k, 0.92.