



Vasker is a versatile, elegant, and portable freestanding architectural ambient and task lighting solution. Personalized lighting for any modern space.

Features

- Patent pending
- Extruded recycled aluminum housing
- Independent individual downlight control
- Wireless unified control of uplights
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

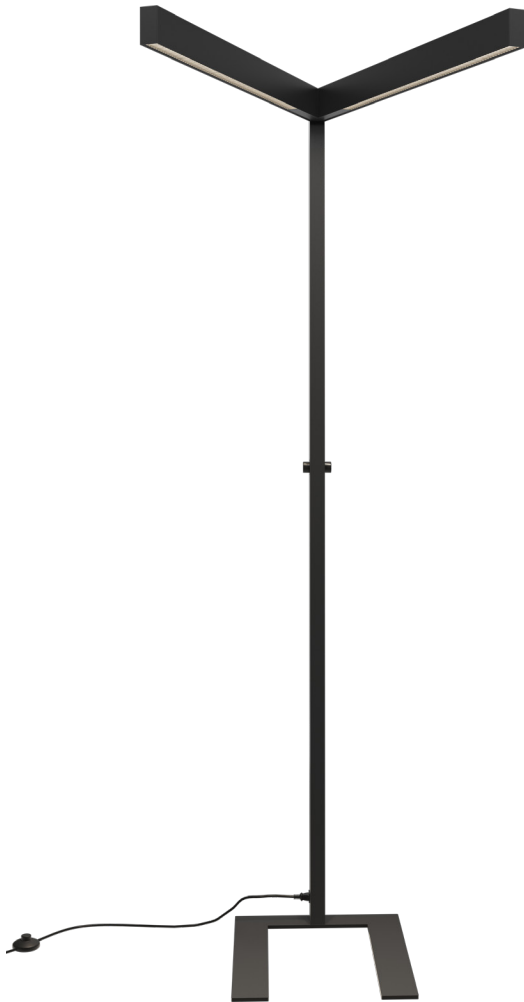

Optics

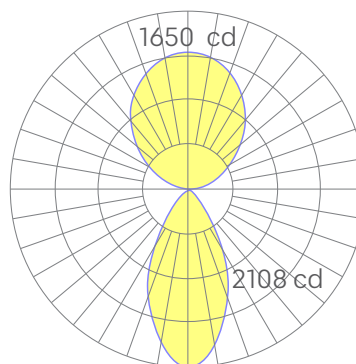

For additional photometric information, see IES files [here](#).

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Color Temperature	3	Driver	4	Voltage
	VASKER	30 35	3000K/90 CRI 3500K/90 CRI	DB	Standard 0-10V 1% dimming	UNV	Universal (120/277V)
5	Optics	6	Control				
	Indirect FL Flat Diffuser	NA	None				
	Direct OC Low glare straight-blade louver						

Performance

Indirect Lumens	Direct Lumens
2244	3959

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details

Modification date: October,2023

Page 2 of 3

Drivers & Electrical

Integral drivers with 0-10V Dimming.

Construction

Extruded, recycled aluminum housing.

Weight

45 lbs

Optics

Uplights feature a flat acrylic diffuser for an even Lambertian distribution. Downlights feature straight-blade louvers for glare-free visual comfort.

Finishes

All luminaires are finished in high quality polyester powder coating.

