

Nu Drop Wide Direct





Stylish accent lighting for surface-mounted or suspended applications. Four beam-spread options and four finish options.


Features

- Extruded, recycled, premium aluminum housing
- Integral dimmable driver
- Decorative fluted rubber sleeve
- Four beam-spread options
- Specifiable color temperature. CRI > 90, R9 >50
- 5 Year, 50,000 hour warranty, damp location rated


Dimensions

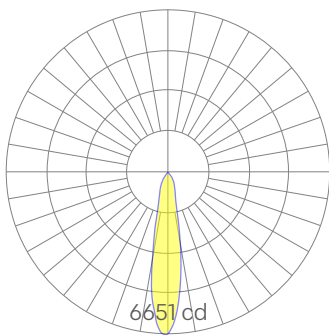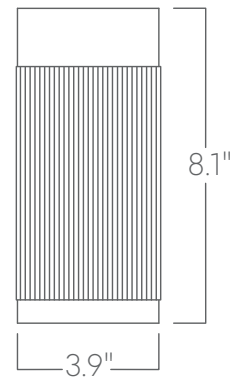


Spot

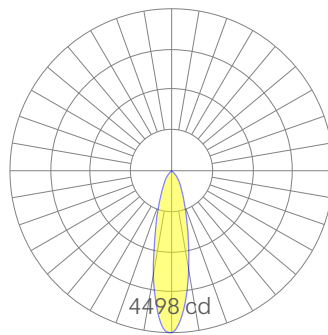

Medium

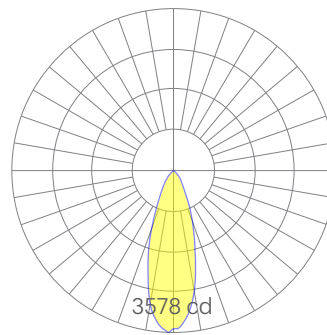

Flood

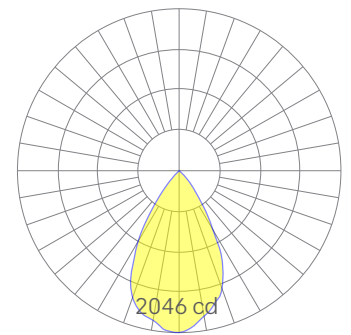

Wide Flood

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Nu Drop Wide Direct

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	NuDrop-W	8	8 inch nominal	27 30 35 40	2700K/90 CRI 3000K/90 CRI 3500K/90 CRI 4000K/90 CRI	LOW MED HIGH	Low output Medium output High output
5	Voltage	6	Driver	7	Finish	8	Mounting
	UNV Universal (120/277V)	DB	Standard 0-10V 1% dimming	BLK WHT GOLD SILVER	Black housing black fluted sleeve White housing black fluted sleeve Gold housing black fluted sleeve Silver housing black fluted sleeve	CP SM CTD-SM PS-X	Cable Pendant Surface Mount Connect the Drops: Surface Mount Pendant Stem (12", 18", 24", 36", 48")
9	Beam Spread	10	Circuit	11	Options		
SP MED FL WFL	17° Beam 25° Beam 41° Beam 65° Beam	NA EMPCK EMCKT	None Emergency battery pack May require additional power feeds. Emergency circuit May require additional power feeds	NA HEX	None Hex Louver		

Performance

Output ¹	Watts/ft	Lumens/ft
Medium	12	1117
High	18	1593

¹Based on 6" tall fixture, WFL beam spread, 90 CRI, and 3500K luminaire using one driver.
Custom outputs available. Please consult factory.
For 4000K multiply by 1.02; for 3000K 0.98; for 2700K, 0.96.

Technical Information




click [here](#) or scan QR code


Wiring diagrams, PoE and sensor details

Nu Drop Wide Direct


Mounting Options

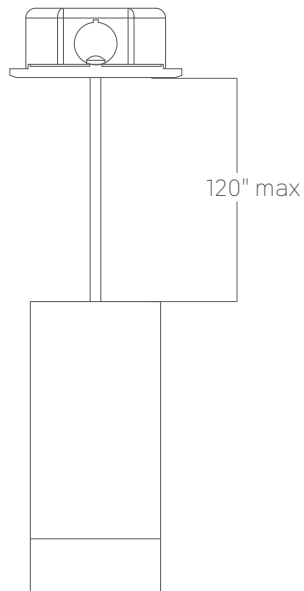


Cable Pendant

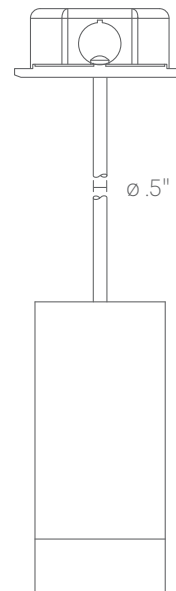

Pendant stem

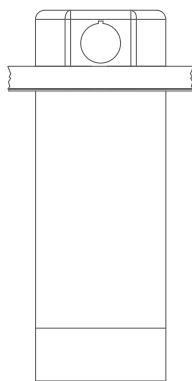

Surface Mount

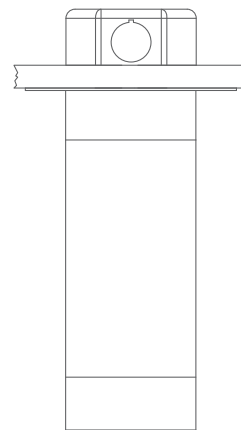


Connect the Drops


Nu Drop Wide Direct

Sample Sketch


Please submit a sketch indicating shape of the pattern and length of the square conduit that will connect the drops (any length up to 8 feet). See example below.

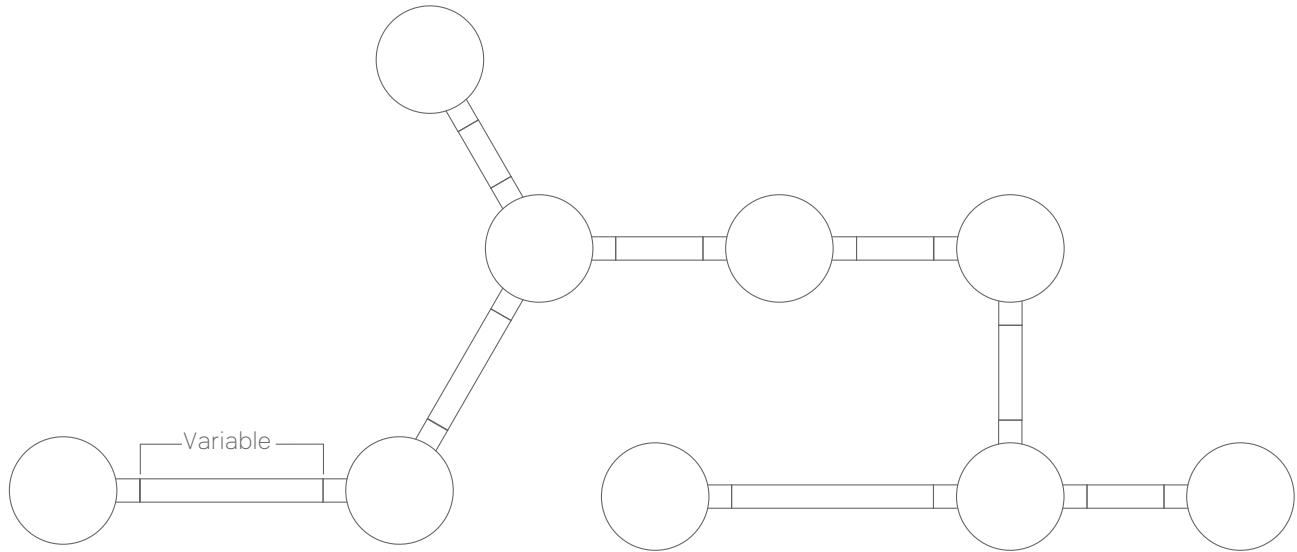


Components




Single Connector

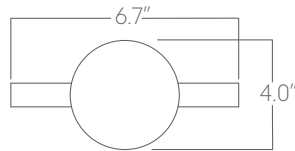


Straight Connector

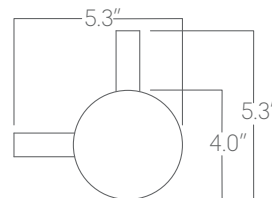


90° Connector

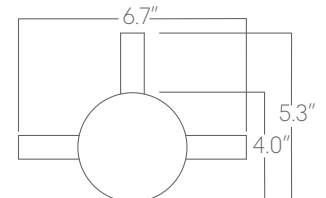


"T" Connector

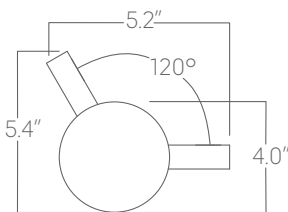


Two-Way 120° Connector

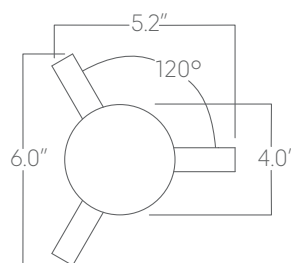

Three-Way 120° Connector

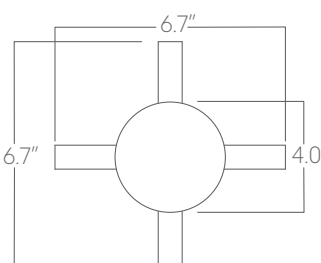

"X" Connector

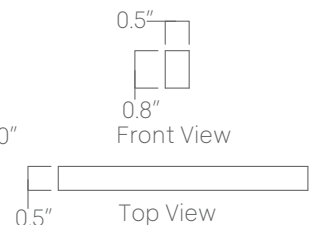

Square Conduit (Up to 8ft)