

# Drop Slim direct




Accent lighting for surface or suspended applications. Available in three heights and three beam-spreads.


## Features

- Extruded, recycled, premium aluminum housing
- Specifiable color temperature. CRI > 90, R9 >70
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

## Dimensions

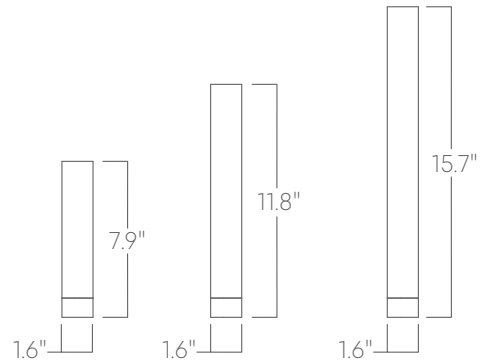

## Optics

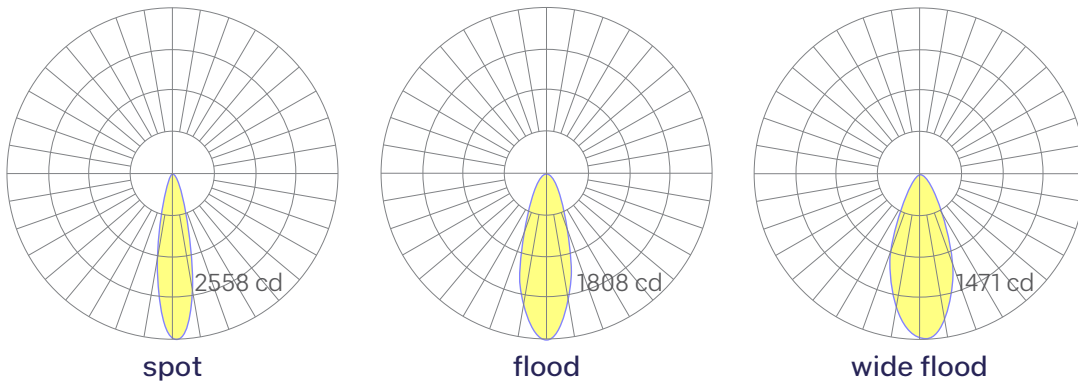

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Drop Slim direct

## Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
<b>DROP-S</b>		<b>8</b>	8 inch nominal	<b>27</b>	2700K/90 CRI	<b>MED</b>	Medium output
		<b>12</b>	12 inch nominal	<b>30</b>	3000K/90 CRI		
		<b>16</b>	16 inch nominal	<b>35</b>	3500K/90 CRI		
				<b>40</b>	4000K/90 CRI		
5	Voltage	6	Driver	7	Finish	8	Mounting
<b>UNV</b>	Universal (120/277V)	<b>DB</b>	Standard 0-10V 1% dimming	<b>BLK</b>	Black	<b>CP</b>	Cable Pendant
				<b>W</b>	White	<b>SM</b>	Surface Mount
9	Beam Spread	10	Circuit	11	Options		
<b>SP</b>	24° Beam	<b>NA</b>	None	<b>NA</b>	None		
<b>FL</b>	34° Beam	<b>EMPCK</b>	Emergency battery pack Supplied in remote enclosure	<b>HEX</b>	Hex Louver		
<b>WFL</b>	42° Beam	<b>EMCKT</b>	Emergency circuit May require additional power feeds				

## Performance

Output <sup>1</sup>	Watts	Lumens
Medium	10	835

<sup>1</sup>Based on 8" tall fixture, WFL beam spread, 90 CRI, and 3500K luminaire using one driver.  
Custom outputs available. Please consult factory.  
For 4000K multiply by 102; for 3000K, 0.98; for 2700K, 0.96.

## Technical Information




click [here](#) or scan QR code


Wiring diagrams, PoE and sensor details

# Drop Slim direct

## Mounting Options

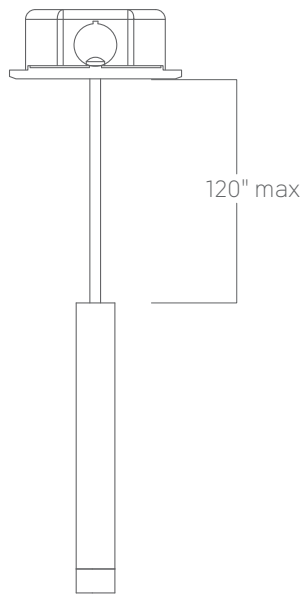

Cable Pendant

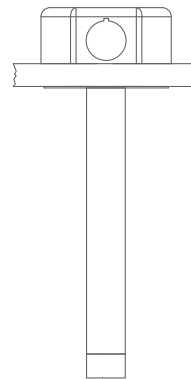

Surface Mount