


Lucie Circle direct

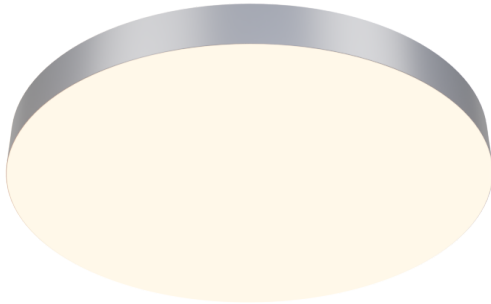


Create a luminous ceiling with our back-lit, projection fabric luminaire. Standard or custom sizes are available to suit any modern space.


Features

- Extruded recycled aluminum housing
- Specifiable color temperature. CRI > 90, R9 > 50
- Custom sizes and finishes available
- Integral, specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)

Dimensions



Optics

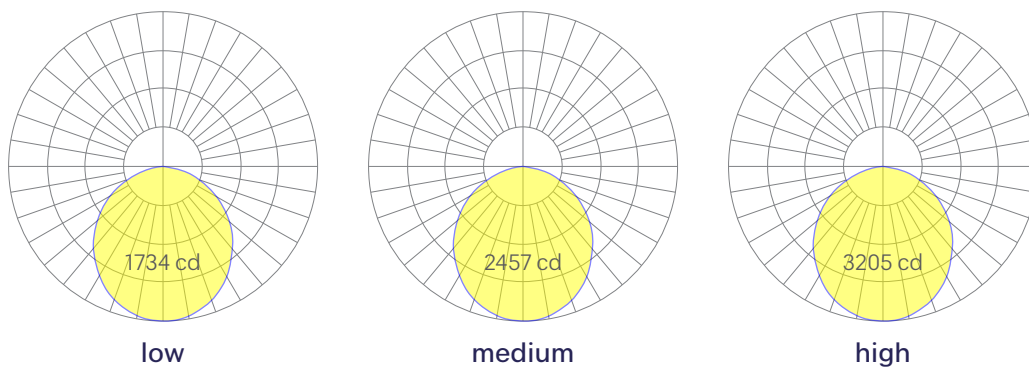

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Lucie Circle direct

Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1 Fixture ID	2 Size	3 Color Temperature	4 Output
LUCIE.C	2 2ft nominal 3 3ft nominal 4 4ft nominal	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI TW Tunable white 2700K–6500K <small>Must use TW10 driver.</small>	LOW Low output MED Medium output HIGH High output CUST Custom output <small>Specify watts or lumens</small>
5 Voltage	6 Driver	7 Finish	8 Mounting
UNV Universal (120/277V)	DB Standard 0-10V 1% DB.1% 0-10V 0.1% ELV Reverse Phase 1% (120V only) <small>For compatible dimmers, click here.</small> TRI Forward phase (120V only) <small>For compatible dimmers, click here.</small> LDE1 Lutron Digital EcoSystem DALI DALI-2 Driver PoE Power over ethernet. TW10 2 ch, 0-10V for tunable white. DMX DMX512 <small>All DMX drivers set to default address 001 and provided in remote enclosures. Contact us for other addressing needs.</small>	W White BLK Black SLV Silver CC Custom Color <small>See finish options here.</small>	AC Aircraft Cable <small>50" steel cable provided. White canopies and power cord unless option specified in section 12.</small> AC3.5 3.5" canopy + jbox adaptor <small>adaptor must be muddled-in. White stems and canopy unless option specified in section 12.</small> ACCC Aircraft cable to Conduit Pipe Canopy SM Surface Mount
9 Optics	10 Sensors/Controls	11 Circuit	12 Options
SD Standard Diffuser SI Customer Supplied Image <small>50-100 DPI at fixture size. Acceptable file types include PSD, PSB, TIFF, AI or EPS.</small>	NA None ACM Acuity nLight Module Only CCS Casambi Module AWNR Lutron Athena Wireless Node Module OTHER Consult Factory	NA None EMCKT Emergency circuit DAYCKT Daylight circuit <small>May require additional power feeds.</small>	NA None

Performance

Output ¹	Watts	Lumens
Low	80	4508
Medium	119	6387
High	160	8330

¹Based on a typically configured 4ft diameter, 90 CRI, 3500K luminaire using one driver. Custom outputs available. Please consult factory.
 For 4000K multiply by 1.02, for 3000K 0.98, for 2700K 0.96, these multipliers also apply to Tunable White. For Tunable White outputs, multiply by 1.05 for 5000K and by 1.1 for 6500K.

Technical Information



click [here](#) or scan QR code

Wiring diagrams, PoE and sensor details



Lucie Circle direct

Drivers & Electrical

Integral drivers* with 0-10V Dimming standard. Several other driver options available; see ordering information.

*DMX drivers are provided in remote enclosures.

Controls

Control modules may be mounted remotely.

Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox.

Consult factory for systems not listed. See [here](#) for more info.

Weight

3 lbs per square foot

Optics

Luminous projection fabric provides excellent diffusion, high transmission, and no LED imaging.

Construction

Housings are extruded, recycled aluminum. Fixtures are available up to a 4ft nominal diameter.


Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.


Lucie Circle direct

Mounting Options


Custom mounting types and ceiling transitions available; consult factory.

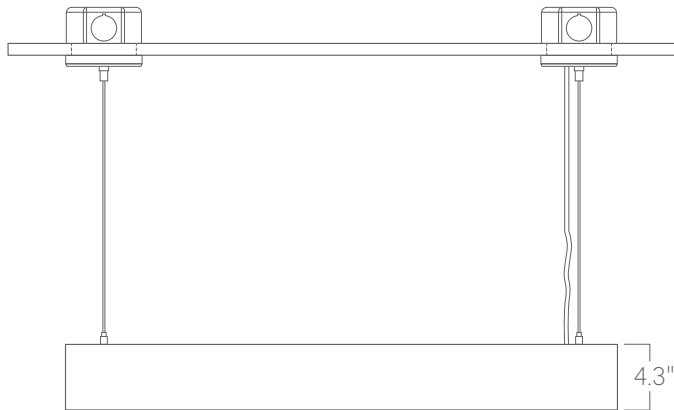


**Aircraft cable
3.5" canopy**

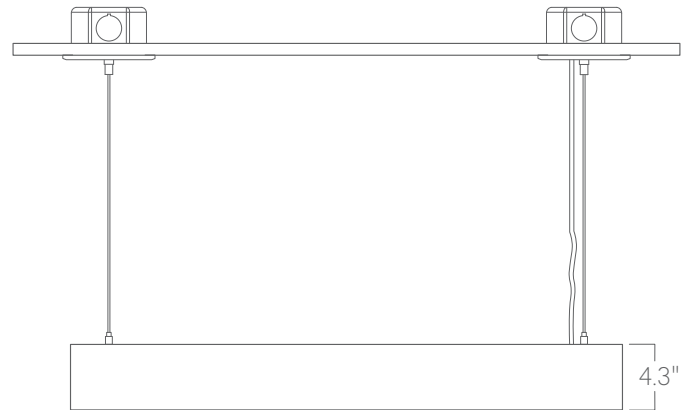

**Aircraft cable
5" canopy**

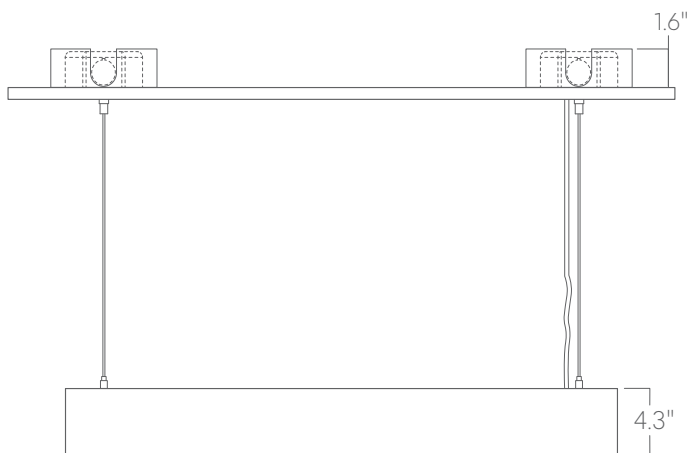

**Aircraft cable
Conduit canopy
with knockouts**

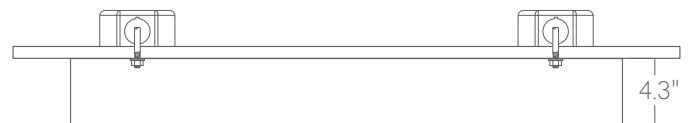

Surface mount

Please consult factory shop drawings for suspension points.

To prevent damage to fixtures, factory designated suspension points must not be field altered.

Do not attempt installation if you do not understand the installation instructions.