

Large Pendant Adjustable Spot module




Large Pendant Adjustable Spot module with 355° rotation. Three beam spreads available and optional hex louver for low glare. Suspended by pendant stem.


Features

- Magnetically held and easily repositioned on site
- Three beam spreads available
- Extruded, recycled, premium aluminum housing
- Aluminum core LED boards, specifiable optics
- Specifiable color temperature. CRI > 90, R9 > 50
- 5 Year, 50,000 hour warranty

Dimensions



Optics

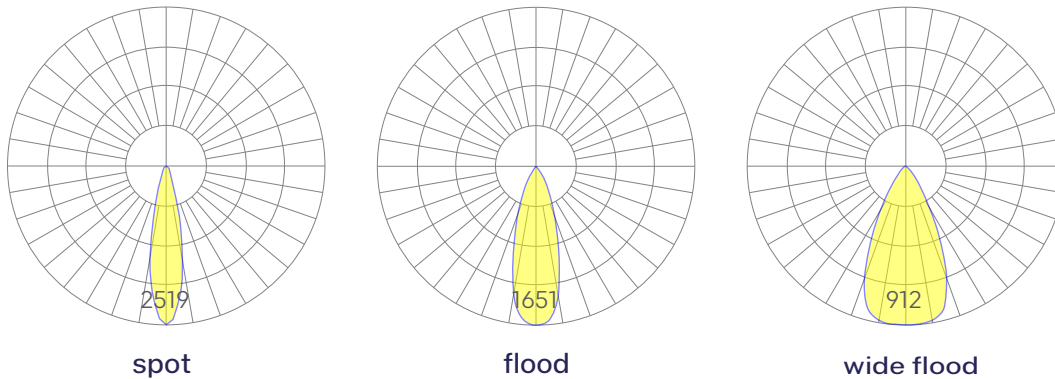

Representative distribution and peak candela. For other options see order information or IES files [here](#).

Large Pendant Adjustable Spot module



Ordering Information

- - - - -
 1 2 3 4 5 6

Example: MAG-PEND ADJ LRG - 35 - MED - W - FL - HEX

Fixture ID <input type="text" value="1"/>	Color Temperature <input type="text" value="2"/>	Output <input type="text" value="3"/>	Finish <input type="text" value="4"/>
MAG-PEND ADJ LRG	27 2700K/90 CRI 30 3000K/90 CRI 35 3500K/90 CRI 40 4000K/90 CRI <small> 95 CRI Artist Studio Chip optional</small>	LOW Low output MED Medium output	BLK Black W White
Beam Spread <input type="text" value="5"/>	Pendant Stem <input type="text" value="6"/>	Optional Accessories <input type="text" value="6"/>	
SP 15° Beam; 2520 CBCP FL 38° Beam; 1641 CBCP WFL 60° Beam; 904 CBCP <small>Field changable optics, consult factory.</small>	12" 18" 24"	NA None HEX Hex Louver ART¹ Artist Studio Series; 98CRI and R9 of 95 <small>¹Only available with CCT of 2700k or 3000k</small>	

Performance

Output ¹	Watts	Lumens
Low	14	670
Medium	17	1040

Based on 'WFL' option, 90 CRI, 3500K luminaire using one driver.

¹For 4000k, multiply by 1.05, for 3000k, 0.96, for 2700k, 0.92.
For Artist Studio Series 95 CRI, multiply by .88